

# TECHNICAL DATA SHEET


## SMALL IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

124x365 mm

Material : CALCYT® plaster

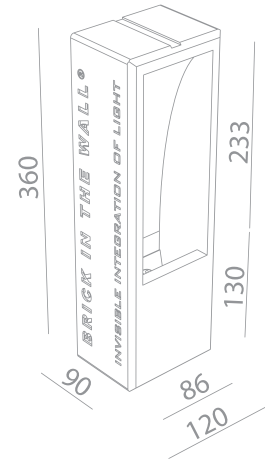

SMALL LED WARMDIM 500LM 230VAC
WARMDIM : DIMS FROM 3000°K TO 2000°K
REF N° 106 71 600 phase DIM
230V/50Hz - 6,0W - incl. line voltage LEDdriver □ - parallel wiring ▽ (0.2m) E CE - P - 4 Step MacAdam - CRI 80 - B

SMALL LED WARMDIM 500LM REMOTE DRIVER
WARMDIM : DIMS FROM 3000°K TO 2000°K
REF N° 106 29 600 remote driver
230V/50Hz - 6,0W - requires remote LEDdriver □ - serial wiring ▽ (0.2m) E CE - P - 4 Step MacAdam - CRI 80 - B

SMALL LED 1000LM 230 VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	106 73 000	106 73 100	106 73 200
230V/50Hz - 6,8W - incl. line voltage LEDdriver □ - parallel wiring ▽ (0.2m) E CE - P - 2 Step MacAdam - CRI 80 - A+			


SMALL LED 1000LM REMOTE DRIVER			
REF N°	2700°K	3000°K	4000°K
excl. driver	106 27 000	106 27 100	106 27 200
230V/50Hz - 6,8W - requires remote LEDdriver □ - serial wiring ▽ (0.2m) E CE - P - 2 Step MacAdam - CRI 80 - A+			

Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

**PLASTERKIT SMALL**  
 REF N° 706 01 000 For mounting into gypsum walls  
 Housing: perforated aluminium

SMALL LED 600LM 230 VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	106 21 500	106 21 000	106 21 100
230V/50Hz - 6,5W - incl. line voltage LEDdriver □ - parallel wiring ▽ (0.2m) E CE - P - 2 Step MacAdam - CRI 90 - A			

SMALL LED 600LM REMOTE DRIVER			
REF N°	2200°K	2700°K	3000°K
excl. driver	106 29 500	106 29 000	106 29 100
230V/50Hz - 6,5W - requires remote LEDdriver □ - serial wiring ▽ (0.2m) E CE - P - 2 Step MacAdam - CRI 90 - A			

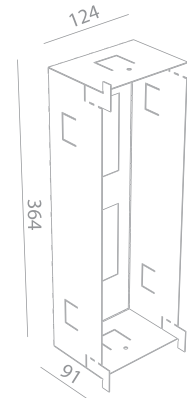

SMALL HAL
REF N° 106 01 040
QT14 - max 40W - G9 230V/50Hz ◊ - ▽ (0.5m) E CE - D

REMOTE LED DRIVER DIM
REF N° 697 60 040 DIM 1-10V DALI PUSH 30W
230V/50Hz - □ - current controlled ▽ - CE - IP20 - 250mA/350mA

