

WIREFLOW

Design by Arik Levy.

Reference

0315.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with twenty LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Diffuser

Pressed-glass diffuser

Materials

Ceiling rose: Steel

Body: Aluminum


Horizontal rods: Steel

Finish



0315-04 Black lacquer (RAL 9005)

Sketch



Electrical characteristics

20 x LED 4,5W 350mA



Total 89.6 W

A+

VIBIA



Led 2700K CRI >80 9805 lm 109 lm/W

Fixture: 3933 lm 43.7 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming DALI 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional SMART

Technical characteristics

- Driver: 350mA / TCI / MAXI JOLLY US DALI 50 / 100/127V / 50/60Hz

Physical characteristics

2 Box / 0.09 x 1.62 x 1.13 m. / Vol. 0.4241 m³ /

Gross weight 27.2 kg. / Net weight 24.2 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 9805

Maximum value : 53.87


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

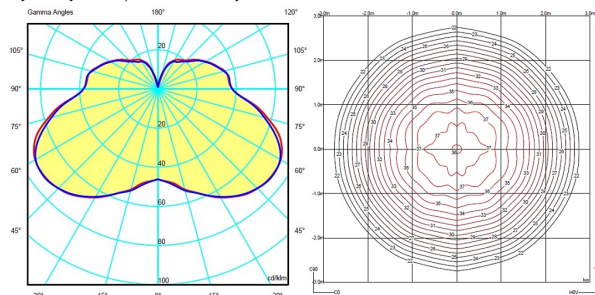

Certificates

VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.

vibia@vibia.com www.vibia.com



