

WIREFLOW

Design by Arik Levy.

Reference

0366.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. Hanging lamp. The elegant structure of fine cables and LED terminal by Wireflow allows the combination of multiple individual pieces to carry out major graphic lighting installations which generate a visual opportunity of lines and points of light and bring a markedly conceptual character to an intangible product. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. The electrical connection point can be positioned on the ceiling or wall.

Diffuser

Polycarbonate diffuser

Materials

Ceiling rose: Steel

Body: Aluminum


Rods: Steel

Finish



0366-04 Black lacquer (RAL 9005)

Sketch



Electrical characteristics

6 x LED 4,5W 350mA

Total 26.9 W



A+



Light source: 2700K CRI >80 2942 lm 109 lm/W

Fixture: 1360 lm 50.37 lm/W

Driver included: CC - Constant Current 350 mA 110-240V 50/60Hz

Electronic dimming DALI 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional SMART

Physical characteristics

1 Box / 0.27 x 0.60 x 0.60 m. / Vol. 0.0972 m³ /

Gross weight 6.7 kg. / Net weight 6.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Efficiency : 46.23%

Coordinate system : CG

Total flux : 2941.60

Maximum value : 320.26


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

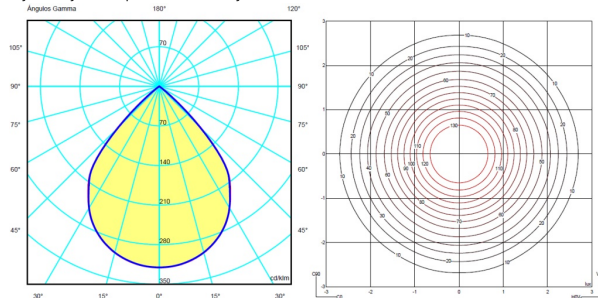

Certificates

