


# PH 3-2½ Wall

PH 3-2½ Wall - 5743145421

The fixture is designed based on the principle of a reflective three-shade system, which directs the light downwards. The shades have a matt white painted interior surface, diffusing the light in a comfortable way.

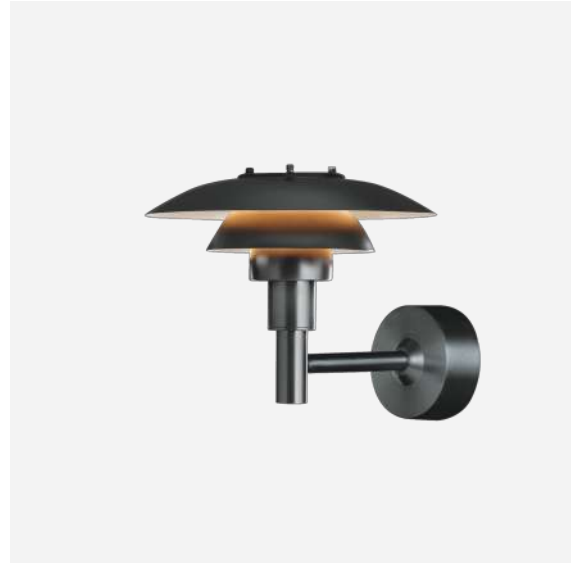

## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish actress Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



## Product info

### Finish

Black, powder coated.

### Materials

Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Form pressed glass.  
Wall box: Die cast aluminium. Wall box cover: Spun aluminium. Arm: Stainless steel.

### Mounting

Terminal block: 1x3x2.5mm<sup>2</sup>. Cable entries: 2x bottom + 3x rear entries for Ø 10-14.5mm cable. Looping:  
Approved, max. 3x1,5mm<sup>2</sup>.

### Sizes and weights

Width x Height x Length (mm) | 283 x 239 x 336 Max 2.4 kg

### Class

Ingress protection IP44. Electric shock protection I w. ground.

### Specification notes


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On  
[www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

### Light source & energy class

A+ - E | 1x60W E27




## Product family




PH 3-2½ Bollard

# Light distribution diagrams


Cartesian

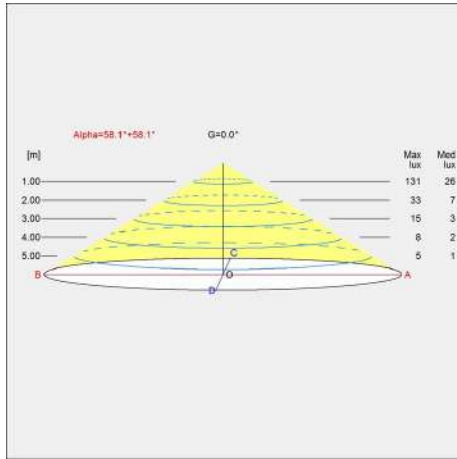

Isolux

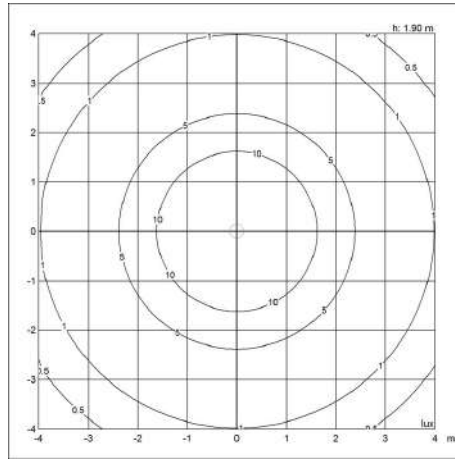

Polar

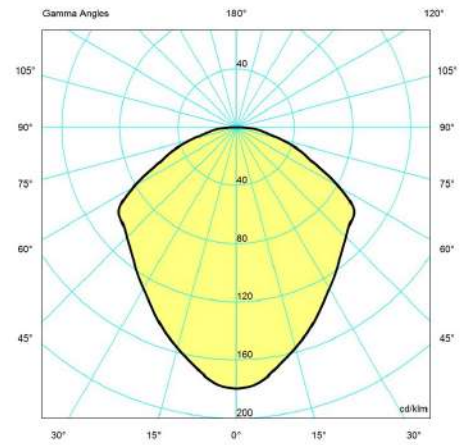

## Spare parts & accessories

Product	Variant number
PH 3-2½ BOL/WAL, TOP SCREWS, 3 PCS. BLK.	5747293405
PH 3-2½ BOL/WAL, GLASS	5747293418

## Data specifications

BUG Rating	<b>B0 U0 G0</b>	Built-in Height	-
Class	<b>I</b>	CRI	-
Efficacy	-	Height	<b>239</b>
IK class	-	Inrush Current	-
IP class	<b>44</b>	Kelvin	-
L80B10 (hours)	-	L80B50 (hours)	-
Length	<b>336</b>	Light source	<b>1x60W E27</b>
Lumen	-	Min. Dim Level (%)	-

**PH 3-2½ Wall**

Net Weight	<b>2.368</b>
<hr/>	
SDCM	-
<hr/>	
Surge Protection. I <sub>max</sub> IEC/EN61643-11, V IEC/EN61547	-
<hr/>	
Watt	-
<hr/>	
Wind Load per m2	-
<hr/>	

Power Factor (P = 100 % / P = 50 %)	-
<hr/>	
Standby (W)	-
<hr/>	
UGR Transversal / Axial	<b>18.9/18.9</b>
<hr/>	
Width	<b>283</b>
<hr/>	