



Bellhop Bollard H 380 mm Non Dimmable White



Bollard version of the Bellhop Outdoor Collection for diffuse light. Made of extruded and die-cast aluminium or stainless steel, Bellhop is available in two heights for the bollard model and with different lumens and luminaire outputs as to comply with any outdoor setting and lighting scenario need. 220-240V power supply included. Ready for installation on solid surface. Each luminaire is equipped with 200 mm cable for connection inside the luminaire...

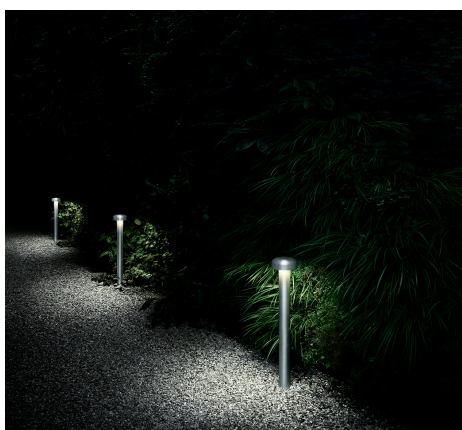

| | |
|---------------------------|---------|
| Mountings | Ground |
| Lamp category | LED |
| Power (W) | 8 |
| Colour temperature | 2700K |
| CRI | 80 |
| Lumen | 551 lm |
| Voltage (V) | 230 |
| Environment | Outdoor |


| | |
|---------------------------|-----------|
| LED type | Power LED |
| Aiming | Fixed |
| Light Distribution | Symmetric |
| Beam Angle | 85 |

| | |
|---------------------------------|--------------|
| Transformer Availability | Included |
| Transformer Mounting | Integrated |
| Transformer Type | Not dimmable |
| Emergency | Without |
| Insulation Class | I |
| Lamp Holder | LED |
| Dimmable | No |

| | |
|---------------|-----------------------|
| Colors | ● F003A21A001 - White |
|---------------|-----------------------|

| | |
|---------------------|--|
| Certificates |     |
|---------------------|--|

| | |
|-------------|--|
| Note | During the installation and the maintenance of the |
|-------------|--|



fixtures it is important to be careful and avoid damages on the paint coating. Damages on the coating exposed to outdoor conditions or water, could cause corrosion. Chemical substances affect the anticorrosion covering protection. For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges. These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.