


SPIGOLO FLOOR

Studiocharlie

Floor, wall/ceiling, pendant and table lamps based on an extruded and tubular aluminium structure, connected with moulded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. The floor version is designed as such to provide a virtual divider to ambiances, while the ceiling and wall versions allow the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.



LED 2700K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	triple, diffused
Switching	mono switch, dimmable
Tension	110/240V
Color temperature	2700K
Luminous flux	335lm+600lm+1765lm (luminous output)
Typ cri	85
Energy class	A+
Ip class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, dimmer on cable, cable lenght 4,5m

Codes

SPI LW2 23
SPI LN2 23

Structure

white
black

PACKAGE


Package 01

Dimension: 57x78x16 cm / Gross weight:
6,5 Kg

Package 02

Dimension: 18 x22x190 cm / Gross
weight: 7 Kg

Certificazioni

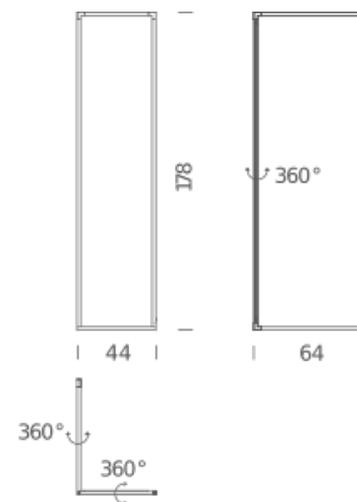

LED 3000K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	triple, diffused
Switching	mono switch, dimmable
Tension	110/240V
Color temperature	3000K
Luminous flux	335lm+600lm+1765lm (luminous output)
Typ cri	85
Energy class	A+
Ip class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, dimmer on cable, cable lenght 4,5m

Codes

SPI LWW 23
SPI LNN 23

Structure

white
black

PACKAGE

Package 01

Dimension: 57x78x16 cm / Gross weight:
6,5 Kg

Package 02

Dimension: 18 x22x190 cm / Gross
weight: 7 Kg

Certificazioni

