


Product Data sheet

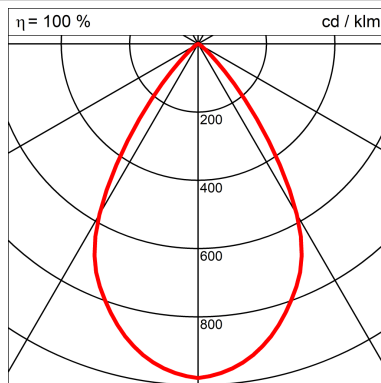

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.14
Variant Description	KIVO interchangeable shades champagne anodised

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

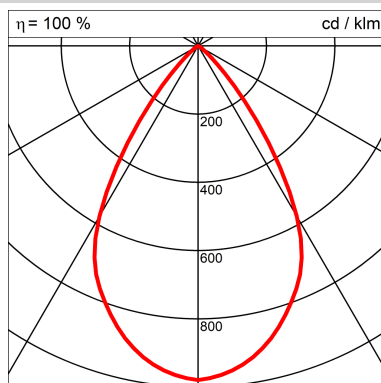

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.11
Variant Description	KIVO interchangeable shades black walnut

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

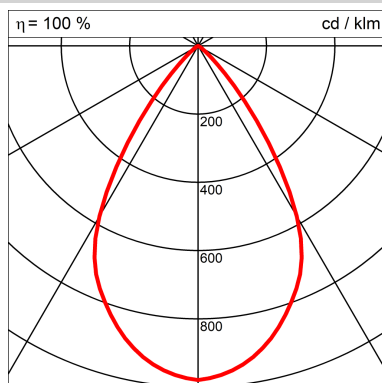

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.10
Variant Description	KIVO interchangeable shades oak

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

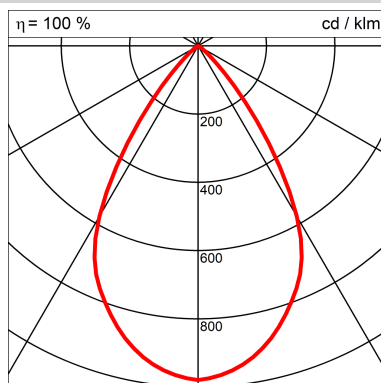

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.2
Variant Description	KIVO interchangeable shades black RAL 9005

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

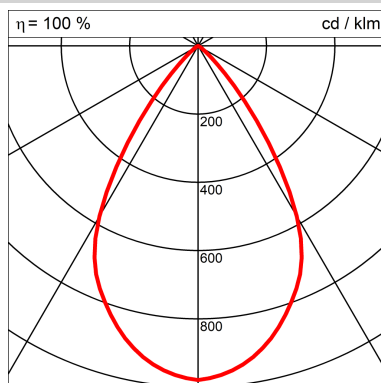

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.3
Variant Description	KIVO interchangeable shades white RAL 9003

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

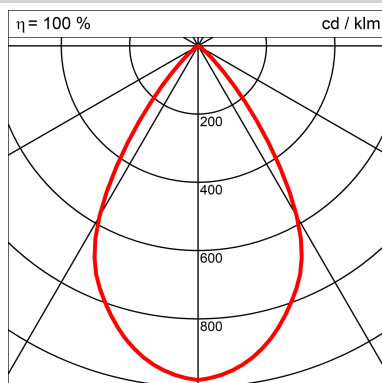

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.0
Variant Description	KIVO interchangeable shades natural anodised

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)


Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps

Product Data sheet

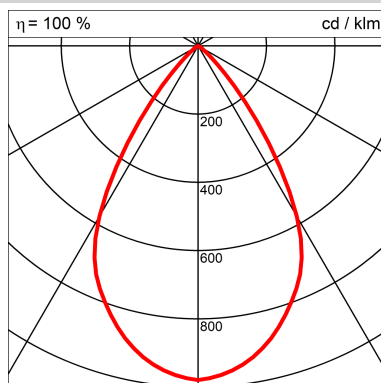

Specifications

Article number	4113.120.27.2
Product name	KIVO Pendelleuchte
Product group	Pendant lamps
Mounting type	Pendant, Surface mounted
Test mark	CE

Variant / Configuration

Number / Name	4111.120.02.9
Variant Description	KIVO interchangeable shades golden brown anodised

Dimensions

Length/Width/Height	see dimensional drawing
Weight	1.24

Luminaires

ZVEI / ILCOS	LED / LED
System power	14 W
Light flux	1260 lm
None	90 lm/W
Colour temperature	2700K
Colour rendering	CRI 95
Lifetime	100000 h
LiTG class	A70

Description

KIVO

KIVO pendant lamp

Mounting: For mounting on the ceiling, cable diam \varnothing 5 mm with steel cord, length 2500 mm, order canopy with control gear or cavity adapter and control gear or mounting rail separately

Lamp housing: Diecast aluminium

Colour: black RAL 9005

Optics: High-quality glass lens technology with a beam angle of 60°, order interchangeable shades separately, UGR < 19

Lamp: LED CRI 95, 2700 K, 3000 K or 4000 K, integrated

Useful life: 100'000h L80 B10 (Ta 25° C)

Control gear: constant current 350mA

Lamp protection level: I

IP Schutzgrad: IP 40

Energy efficiency class: A to A++, includes built-in LED lamps, unexchangeable lamps