

I.CONO

Design by Lievore Altherr Molina.

Reference

0720.

Application

Wall Lamps

Installation type

Surface

Description

Wall light for reading. Designed by Lievore, Altherr, Molina. The mechanisms for rotating the head and the base are concealed, thanks to the high technical quality of all the processes involved in the creation of this piece. Available in four finishes: gloss white and black lacquer and matt milk and white lacquer. Switch in the base for convenience.

Diffuser

Polycarbonate diffuser

Materials

Shade: Polycarbonate

Base: Zamak

Finish



0720-10 White (NCS S 0300-N)



0720-21 Grey D1 (NCS S 7000-N)



0720-25 Beige D1 (NCS S 4005-Y50R)





0720-37 Terra Red (NCS S 4040-Y70R)



0720-42 Blue M1 (NCS S 5010-B10G)

Sketch



Fixture: 307 lm 7 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Technical characteristics

- Switch on the base

Physical characteristics

1 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0441 m³ /

Gross weight 2.0 kg. / Net weight 1.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 53.78%

Coordinate system : CG

Total flux : 570.00 lm

Maximum value : 194.22 cd/klm

Light position : C=285.00 G=10.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

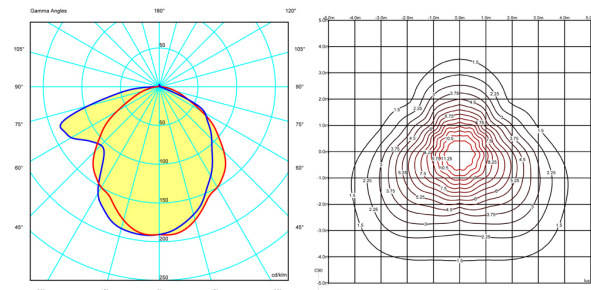

Certificates



Electrical characteristics

VIBIA LIGHTING, S.L.U. Barcelona, 220174008820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.

vibia@vibia.com www.vibia.com

1 x LEDSTAR CLASS.P40 E14 230V 6W



OR
1 x COMPACT FLUORESCENT E14 230V 15W (MEGAMAN LILIPUT
PLUS o similar)



OR
1 x E14 230V 46W Eco



Total 12.0 W

Total 15.0 W

Total 46.0 W

