

GUISE

Design by Stefan Diez.

Reference

2282.

Application

Hanging lamps

Installation type

Surface

Description

Vibia presents a suspended light fitting made of a single vertical piece of glass. The powerful and pointed LED source is transformed through its design into an even background lighting effect.

Diffuser

Borosilicate glass diffuser

Materials

Ceiling rose: Steel

Body: Aluminum

Finish



2282-18 Graphite (ADAPTA RF 9913 WX)

Sketch




Electrical characteristics

1 x LED STRIP 24V 12W

Total 12.0 W



VIBIA

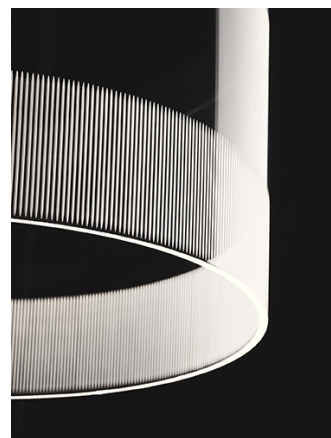

Light source: 3000K CRI >90 1069 lm 118 lm/W

Driver included: CV - Constant Voltage 110-240V 50/60Hz

Electronic dimming 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Technical characteristics

- Sensor on the LED base

Physical characteristics

0 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0000 m³ /

Gross weight 0.0 kg. / Net weight 0.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 26.02 lm/W

Coordinate system : CG

Total flux : 398.74 lm

Maximum value : 329.76 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

