

TECHNICAL DATA SHEET


INDOX 30 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable \odot 0° - 10°

114x134 mm

Material : CALCYT® plaster

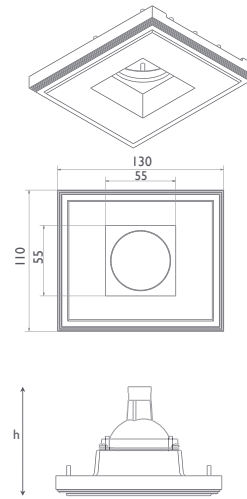

INDOX 30 LED 450LM CRI 97 230VAC
REF N° 274 71 930 phase DIM CRI 97 2700°K
REF N° 274 71 830 phase DIM CRI 97 3000°K
6,5W - 450lm - 2 Step MacAdam \square 230V/50Hz Standard beam angle 32° (options 40°, 50°) Parallel wiring - Connects directly to 230VAC h=98 - - - -


INDOX 30 LED 450LM CRI 97 REMOTE DRIVER
REF N° 274 29 930 excl. LED driver CRI 97 2700°K
REF N° 274 29 830 excl. LED driver CRI 97 3000°K
6,5W - 450lm - 2 Step MacAdam Standard beam angle 32° (options 40°, 50°) Serial wiring - Requires remote LED driver h=98 - - - -

INSTALLATION KIT

- STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm
REF N° 274 99 025 installation system for gypsum ceiling 25 mm
REF N° 274 99 030 installation system for gypsum ceiling 30 mm
REF N° 843 00 000 Concrete box Indox 30/50 - Galvanized steel

INDOX 30 LED 600LM 230VAC
REF N° 274 71 530 phase DIM CRI 80 2200°K
REF N° 274 71 030 phase DIM CRI 90 2700°K
REF N° 274 71 130 phase DIM CRI 90 3000°K
6,5W - 600lm - 2 Step MacAdam \square 230V/50Hz Standard beam angle 32° (options 24°, 40°, 50°) Parallel wiring - Connects directly to 230VAC h=98 - - - -

INDOX 30 LED 600LM REMOTE DRIVER
REF N° 274 29 530 excl. LED driver CRI 80 2200°K
REF N° 274 29 030 excl. LED driver CRI 90 2700°K
REF N° 274 29 130 excl. LED driver CRI 90 3000°K
6,5W - 600lm - 2 Step MacAdam Standard beam angle 32° (options 24°, 40°, 50°) Serial wiring - Requires remote LED driver h=98 - - - -



BEAM ANGLES

- STANDARD** (included) beam angle 32°
REF N° 204 30 024 optional beam angle 24°
REF N° 204 30 040 optional beam angle 40°
REF N° 204 30 050 optional beam angle 50°

INDOX 30 LED 200LM REAL SPOT 230VAC
REF N° 274 70 510 phase DIM CRI 80 2200°K
REF N° 274 70 010 phase DIM CRI 90 2700°K
REF N° 274 70 110 phase DIM CRI 90 3000°K
3W - 200lm - 3 Step MacAdam \square 230V/50Hz 5° beam angle - - - - Parallel wiring - Connects directly to 230VAC h=98

INDOX 30 LED 200LM REAL SPOT REMOTE DRIVER
REF N° 274 29 510 excl. LED driver CRI 80 2200°K
REF N° 274 29 010 excl. LED driver CRI 90 2700°K
REF N° 274 29 110 excl. LED driver CRI 90 3000°K
3W - 200lm - 3 Step MacAdam 5° beam angle - - - - Serial wiring - Requires remote LED driver h=98

REMOTE LED DRIVER DIM 250mA/350mA

- REF N° 697 60 040** DIM 1-10V DALI PUSH 30W
REF N° 697 60 150 DIM 1-10V 100W
REF N° 697 30 150 DIM DALI 100W

