
## Standard lamp, clear

A 100W/230/C/E27



Product Datasheet Date: 17.07.2020



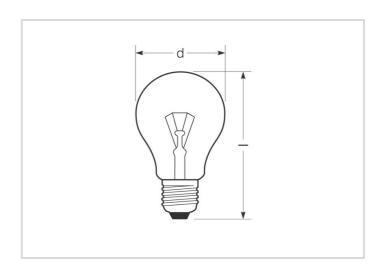







10

1340 1 00

#### **General Data**

Article No.	11103222
Code	Standard 100W/C/E27
Customs tariff no.	85392290
Box quantitiy (pcs.)	100
EAN Box	4008597430039
Length of box in m	0.57
Width of box in m	0.3
Height of box in m	0.21
ETIM class	EC000078
ETIM class name	Standard-shaped incandescent lamp
Product status	Inactive

#### **Electric Parameters**

Lamp nominal wattage	100 W	
Rated wattage	100.0 W	

#### **Light Application Parameters**

Rated lamp luminous flux	1340 lm
Colour rendering index Ra	100

### Standard lamp, clear

#### A 100W/230/C/E27



#### **Service Life**

Average nominal lifespan	1000 h

#### **Specification**

Diameter max.	55 mm
Length max.	97 mm
Finish	clear
Socket	E27

#### **Notes**

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

#### Base




E27 IEC/EN 60061-1 sheet 7004-21-9


#### Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continouus red-dominated spectrum as the light is generated by heating up a tungsten filament.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.







daylight(D 65)

#### General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

# **Standard lamp, clear** A 100W/23O/C/E27



All technical data without guarantee.