

FUNNEL

Design by .

Reference

2013.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle. Available in two finishes: matt white lacquer or matt gold leaf.

Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel

Finish



2013-10 White (NCS S 0300-N)



2013-36 Soft Pink (NCS S 1010-Y50R)




2013-47 Green L1 (NCS S 4005-G80Y)



2013-51 Matt gold leaf (Gold)

Sketch



Electrical characteristics

6 x LED 4,5W 350mA

Total 26.9 W



VIBIA



Light source: 2700K CRI >80 2942 lm 109 lm/W

Fixture: 2301 lm 85 lm/W

Driver included: CC - Constant Current 350 mA 110-240V 50/60Hz

Electronic dimming DALI 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional SMART

Technical characteristics

- DALI electronic dimming, 1-10V, Push

Physical characteristics

1 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0441 m³ /
Gross weight 3.0 kg. / Net weight 2.7 kg.


Installation and assembly

Please, see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

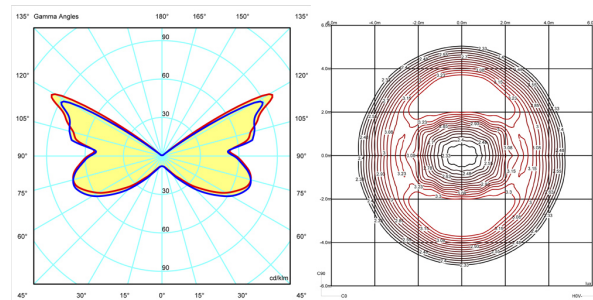

Certificates

