

**BEGA****24 394**

Ceiling and wall luminaire

IP 65

Project · Reference number

Date

**Product data sheet****Application**

Unshielded LED ceiling and wall luminaire with high protection class.

A luminaire made of die cast aluminium and with an impact resistant crystal glass.

**Product description**

Luminaire made of aluminium alloy, aluminium and stainless steel  
 Crystal glass, white inside  
 2 mounting holes  $\varnothing$  4.5 mm  
 Distance apart 325 mm  
 2 screw cable glands with strain relief for through-wiring of the mains supply cable from  $\varnothing$  7-12 mm  
 1 screw cable gland closed at the factory with a dummy plug  
 Connection terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 LED power supply unit  
 220-240 V  $\sim$  0/50-60 Hz  
 DC 170-280 V  
 DALI controllable  
 A basic isolation exists between power cable and control line  
 Safety class I  
 Protection class IP 65  
 Dust-tight and protection against water jets  
 Impact strength IK10  
 Protection against mechanical impacts < 20 joule  
**CE** – Conformity mark  
 Weight: 5.7 kg

**Lamp**

Module connected wattage	23.9 W
Luminaire connected wattage	27.2 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{max}} = 35^\circ\text{C}$

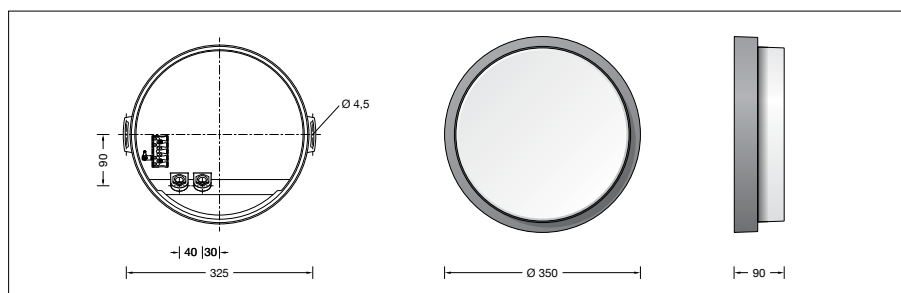
On request we can offer you modifications for environments with higher temperatures as a customized product.

**24 394 K3**

Module designation	LED-0993/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	3975 lm
Luminaire luminous flux	2610 lm
Luminaire luminous efficiency	96 lm/W

**24 394 K4**

Module designation	LED-0993/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	4180 lm
Luminaire luminous flux	2745 lm
Luminaire luminous efficiency	100,9 lm/W

**Service life · Ambient temperature**

Rated temperature  $t_a = 25^\circ\text{C}$   
 LED psu: > 50,000h  
 LED module: 150,000h (L80 B50)

Ambient temperature  $t_{a\text{max}} = 35^\circ\text{C}$  (100 %)  
 LED psu: 50,000h  
 LED module: 130,000h (L80 B50)

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Inrush current**

Inrush current: 5 A / 50  $\mu\text{s}$   
 Maximum number of luminaires of this type per miniature circuit breaker:  
 B10A: 31 luminaires  
 B16A: 50 luminaires  
 C10A: 52 luminaires  
 C16A: 85 luminaires

**Article No. 24 394**

LED colour temperature optionally 3000K or 4000K  
 3000 K – Article number + **K3**  
 4000 K – Article number + **K4**  
 Colour graphite or silver  
 graphite – article number  
 silver – article number + **A**

**Light distribution**