

HALO

Design by Martin Azua.

Reference

2362.

Application

Wall Lamps

Installation type

Surface

Description

Wall sconce. The light rods, anchored to an aluminium profile are arranged around a central perpendicular axis, in parallel or angled. The modular character allows for large interconnected lights murals to be configured. Updated launch dates: November.

Diffuser

Methacrylate diffuser

Materials

Diffuser: Methacrylate
LED support: Aluminum
Wall support: Aluminum

Finish




2362-11 Black (NCS S 8500N)



2362-13 Grey L1 (NCS S 1000-N)

Sketch

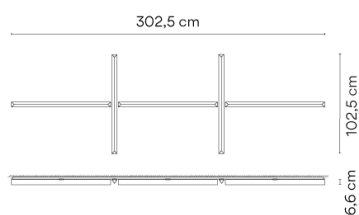

Electrical characteristics

5 x LED STRIP 24V 15,3W

Total 76.5 W



VIBIA



Light source: 3000K CRI >80 7640.2 lm 99.87 lm/W

Fixture: 5786.7 lm 75.64 lm/W

Driver included: CV - Contant Voltage 220-240V 50/60Hz

Electronic dimming 1-10V

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Technical characteristics

- Surface

Physical characteristics

0 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0000 m³ /

Gross weight 0.0 kg. / Net weight 0.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Certificates

