

PUCK

Design by Jordi Vilardell.

Reference

5410.

Application

Wall Lamps

Installation type

Surface

Description

Panel light designed by Jordi Vilardell. The use of top-quality opal triplex glass and injection-moulded aluminium gives the product a perfect finish. The product gives a warm light without shadows or glare.

Diffuser

Mat opal triplex blown-glass diffuser

Materials


Ceiling rose: Aluminum

Finish



5410-03 White (RAL 9016)

Sketch



Electrical characteristics



1 x G9 230V 48W Eco



Total 48.0 W



VIBIA



Fixture: 228 lm 5 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Physical characteristics

1 Box / 0.19 x 0.41 x 0.41 m. / Vol. 0.0310 m³ /

Gross weight 2.1 kg. / Net weight 1.9 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 54.17%

Coordinate system : CG

Total flux : 420.00 lm

Maximum value : 139.80 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

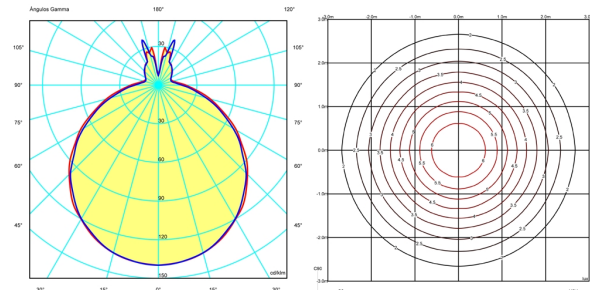

Certificates

