

BEGA**84 228**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Garden and pathway luminaires with downward-directed light for effective lighting in private gardens.

Luminaire for the uniform and glare-free illumination of ground surfaces.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Safety glass
 Silicone gasket
 Reflector surface made of pure aluminium
 Luminaire with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones
 Base plate with 3 fixing holes
 \varnothing 5.5 mm · Pitch 120° · Pitch circle \varnothing 60 mm
 Line connector for mains supply cable up to \varnothing 13 mm · max. 3 × 2,5[□]
 BEGA Ultimate Driver®
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 BEGA Thermal Switch®
 Temporary thermal shutdown to protect temperature-sensitive components
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK08
 Protection against mechanical impacts < 5 joule
 CE – Conformity mark
 Weight: 3.0 kg

Inrush current

Inrush current: 7.8 A / 112 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 38 luminaires
 B 16A: 61 luminaires
 C 10A: 64 luminaires
 C 16A: 102 luminaires




Lamp

Module connected wattage	4.2 W
Luminaire connected wattage	5.3 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a,max} = 50$ °C

84 228 K3

Module designation	2x LED-0234/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	560 lm
Luminaire luminous flux	309 lm
Luminaire luminous efficiency	58,3 lm/W

Light distribution

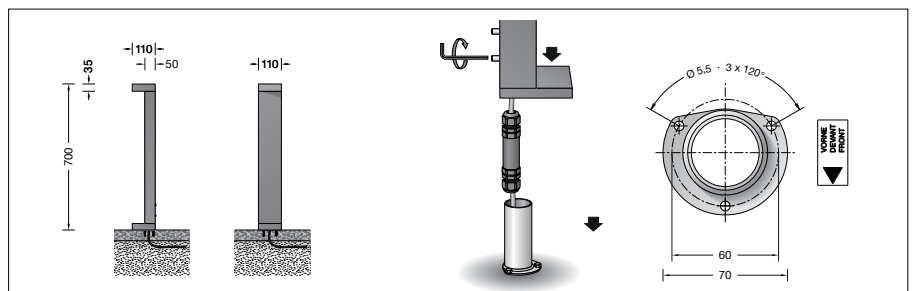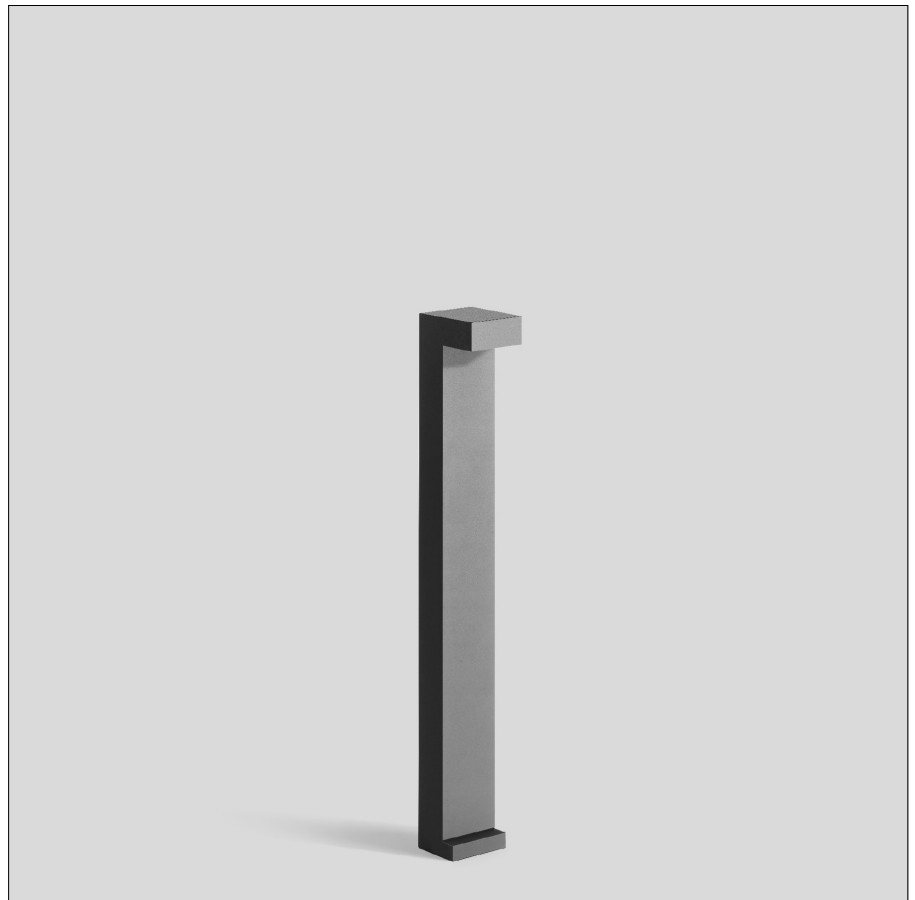

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C	LED psu: > 50,000 h
LED module: > 200,000 h (L 80 B 50)	LED module: > 200,000 h (L 80 B 50)
	100,000 h (L 90 B 50)

Ambient temperature $t_{a,max} = 50$ °C (100 %)	LED psu: 50,000 h
LED module: 100,000 h (L 80 B 50)	LED module: 100,000 h (L 80 B 50)

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.
 Recommended light point interval 6.5 m.

Article No. 84 228

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Accessories

Distribution box for installation in soil
70 730 Distribution box with 7 cable entries
 Connection terminals 5 × 4[□]
71 053 Distribution box with 10 cable entries
 Connection terminals 6 × 16[□]

A separate instructions for use can be provided upon request.