


OPTIONAL


honeycomb louver

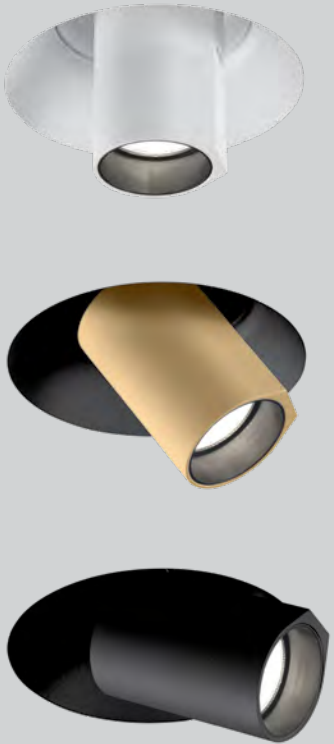

	CODE
	90051131

more options and specs on page 736





1.0 TRIMLESS




 LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated


 IP20 0°-60°|355°  39° SDCM2 L70|55K 0.17kg

	CODE
	164561W_
	164561CH_
	164561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K  31°	470 >90	3
3000K  31°	500 >90	5
2000-3000K 16V	355 >90	9

ALWAYS USE


alu plasterkit  73-76  60  4-23



	CODE
	90017210

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401



1.0

 LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-60°|355°  39° SDCM2 L70|55K 0.20kg

wire springs  86-89  60  4-23

	CODE
	164461W_
	164461CH_
	164461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K  31°	470 >90	3
3000K  31°	500 >90	5
2000-3000K 16V	355 >90	9


ALWAYS USE



driver | 350mA




	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

2.0

 2x LED COB 6W | 700mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-60°|355°  31° SDCM2 L70|55K 0.40kg

wire springs  87x176  60  4-23

	CODE
	164261W_
	164261CH_
	164261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801

more options and specs on page 739

BLIEK petit

CEILING RECESSED



205