




low recessed
depth only for
2.0 + 3.0 LED
version



IC rated

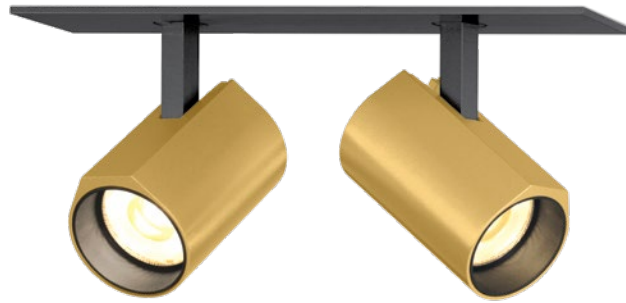

1.1

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L80|50K 0.13kg

blade springs 32x66 85 min. 4

	CODE
176461W	
176461Q	
176461K	
176461B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	465 >90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724



2.0

2x LED COB 7W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.26kg

blade springs 32x145 60 min. 4

	CODE
176261W	
176261Q	
176261K	
176261B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x450 >90	3
3000K	2x465 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801

more options and specs on page 727



3.0

3x LED COB 7W | 700mA | 26V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.39kg

blade springs 32x221 60 min. 4

	CODE
176361W	
176361Q	
176361K	
176361B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x450 >90	3
3000K	3x465 >90	5

ALWAYS USE


driver | 700mA | only 1x needed

	CODE
20W dim	90225604
28W DALI	90245801


more options and specs on page 727

CENO

CEILING RECESSED



291



327 | 387