



WEVER & DUCRÉ
LIGHTING

FINLIN 2.0

370284B3

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Jet Black

IP20

Interior

700 lm

9005^a

LED

2700 K

3-step binning

OPTICAL

Opal

PHYSICAL

Diameter 9 mm

Height 1049 mm

0.18 kg

ELECTRICAL

incl. PS | phase-cut dim

220 - 240 V


Total connected power 12 W

LED Inset 12 W

PC2

Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.

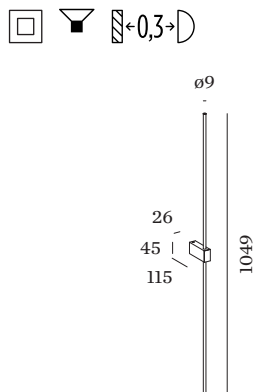



WEVER & DUCRÉ
LIGHTING

FINLIN 2.0

370284B3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.93	0.89	0.86	0.83
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.