


OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 755

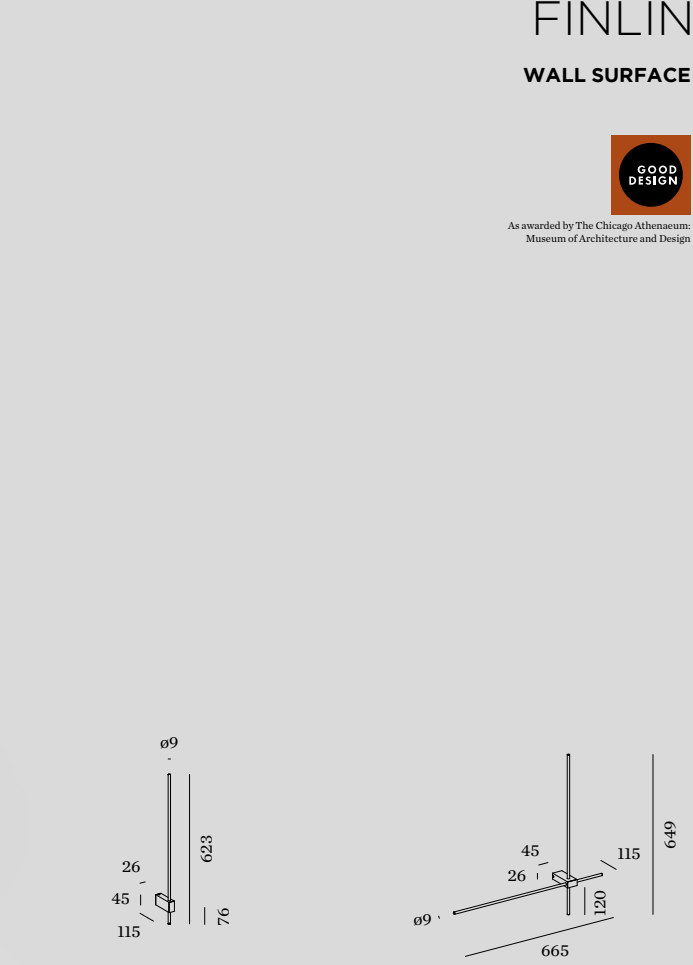

1.0

 LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.15kg

	CODE
	370584CH_
	370584K_
	370584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	380 >90	5

4.0

 LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.20kg

	CODE
	370884CH_
	370884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	760 >90	5

FINLIN

WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



225



417

