

TRAIN 1.0

306668B3

GENERAL

Wall
Surface
Jet Black
IP20
Interior
385 lm
9005 ^a

LED

2700 K
CRI 90
L70 / 50000 h
3-step binning

OPTICAL

Beam angle 38°

PHYSICAL


Length 50 mm	
Width 50 mm	
Height 85 mm	
0.24 kg	

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 5.9 W
PC1
Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.




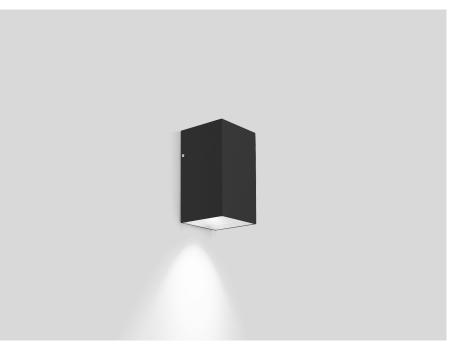

(⊒) [3+0,3+])



LIGHT DISTRIBUTION



['306668B301'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those December 15, 2020 for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply. © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com 1/2



306668B3

1.0

CONE DIAGRAM

38°

h (m)	E0° (lx)	ø (m)
1	786	0.69
2	197	1.38
3	87	2.06
4	49	2.75
5	31	3.44

['306668B301'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those December 15, 2020 for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply. © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com 2/2