



WEVER & DUCRÉ
LIGHTING

TRAIN 1.0

306668G3

GENERAL

Wall
Surface
Gold
IP20
Interior
385 lm

LED

2700 K
CRI 90
L70 / 50000 h
3-step binning

OPTICAL

Beam angle 38°

PHYSICAL

Length 50 mm
Width 50 mm
Height 85 mm
0.24 kg

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 5.9 W
PC1
Safety distance 0.3 m




Project

Type


Notes

Quantity

Date

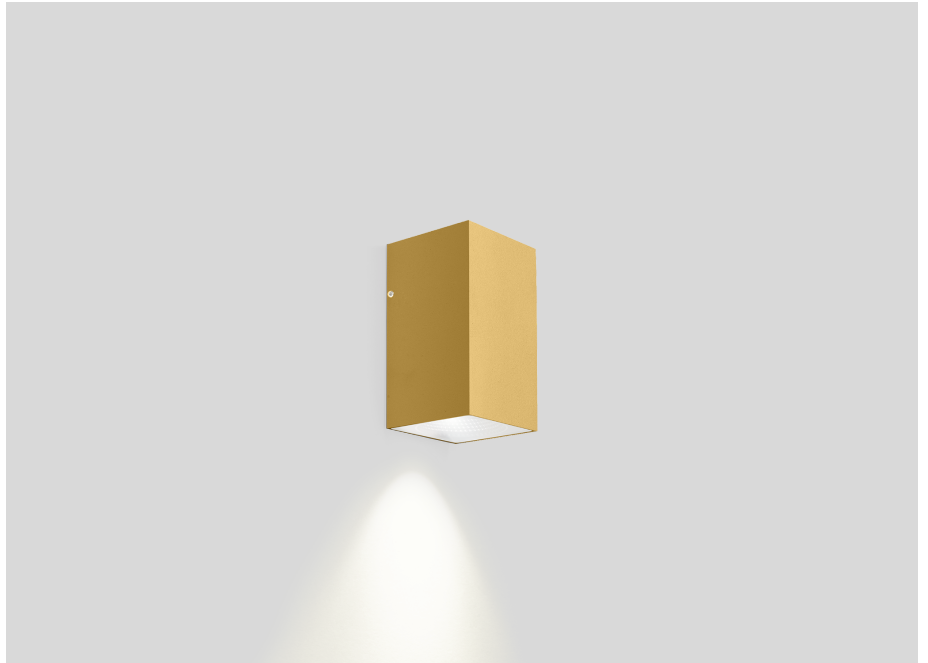

LIGHT DISTRIBUTION






WEVER & DUCRÉ
LIGHTING

TRAIN 1.0

306668G3

CONE DIAGRAM

38°



h (m)	E0° (lx)	ø (m)
1	786	0.69
2	197	1.38
3	87	2.06
4	49	2.75
5	31	3.44