



WEVER & DUCRÉ
LIGHTING

TRAIN 1.0

306668W3

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Signal White

IP20

Interior

385 lm

9003^a

LED

2700 K

CRI 90

L70 / 50000 h

3-step binning

OPTICAL

Beam angle 38°

PHYSICAL

Length 50 mm

Width 50 mm

Height 85 mm

0.24 kg

ELECTRICAL

phase-cut dim




220 - 240 V

Total connected power 5.9 W


PC1

Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.

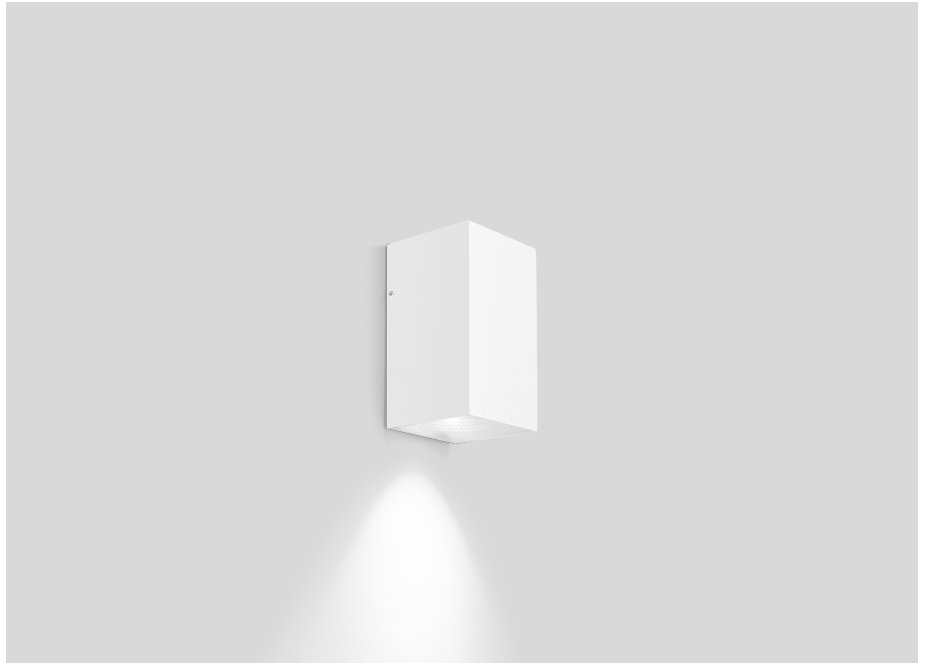

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

TRAIN 1.0

306668W3

CONE DIAGRAM

38°

h (m)	E0° (lx)	ø (m)
1	786	0.69
2	197	1.38
3	87	2.06
4	49	2.75
5	31	3.44