



WEVER & DUCRÉ  
LIGHTING

# TRAIN 1.0

306668L5

## GENERAL

Wall  
Surface  
Aluminium Brushed  
IP20  
Interior  
405 lm

## LED

3000 K  
CRI 90  
L70 / 50000 h  
3-step binning

## OPTICAL

Beam angle 38°

## PHYSICAL

Length 50 mm  
Width 50 mm  
Height 85 mm  
0.24 kg

## ELECTRICAL

phase-cut dim  
220 - 240 V  
Total connected power 5.9 W  
PC1  
Safety distance 0.3 m




Project

Type


Notes

Quantity

Date

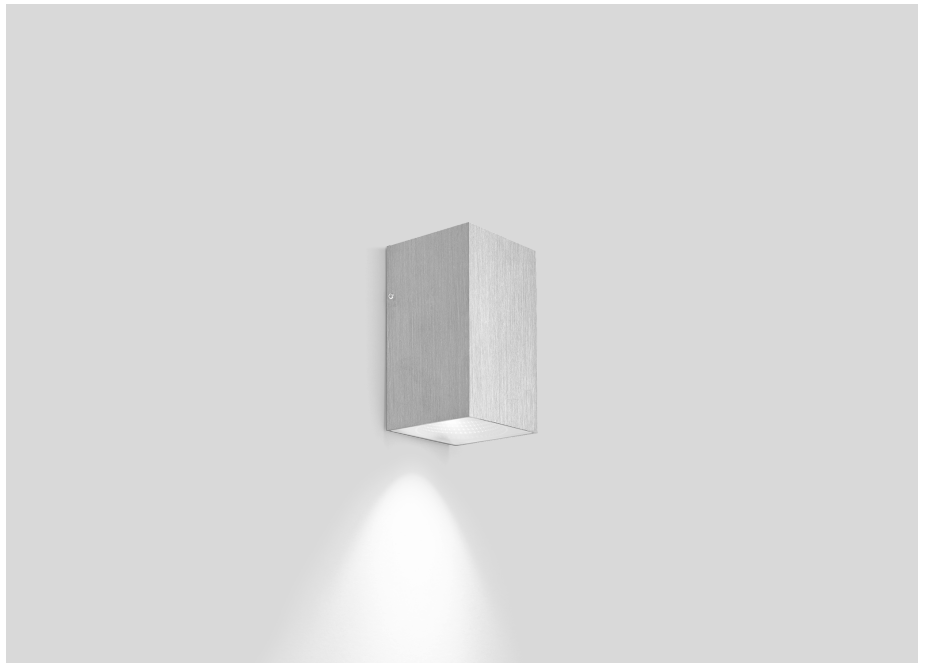

## LIGHT DISTRIBUTION






WEVER & DUCRÉ  
LIGHTING

# TRAIN 1.0

306668L5

## CONE DIAGRAM

38°



h (m)	E0° (lx)	ø (m)
1	836	0.69
2	209	1.38
3	92	2.06
4	52	2.75
5	33	3.44