

TRAIN 1.0

306668W5

GENERAL

Wall
Surface
Signal White
IP20
Interior
405 lm
9003^a

LED

3000 K
CRI 90
L70 / 50000 h
3-step binning

OPTICAL

Beam angle 38°

PHYSICAL

Length 50 mm
Width 50 mm
Height 85 mm
0.24 kg

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 5.9 W
PC1
Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.




Project _____

Type _____


Notes _____

Quantity _____

Date _____

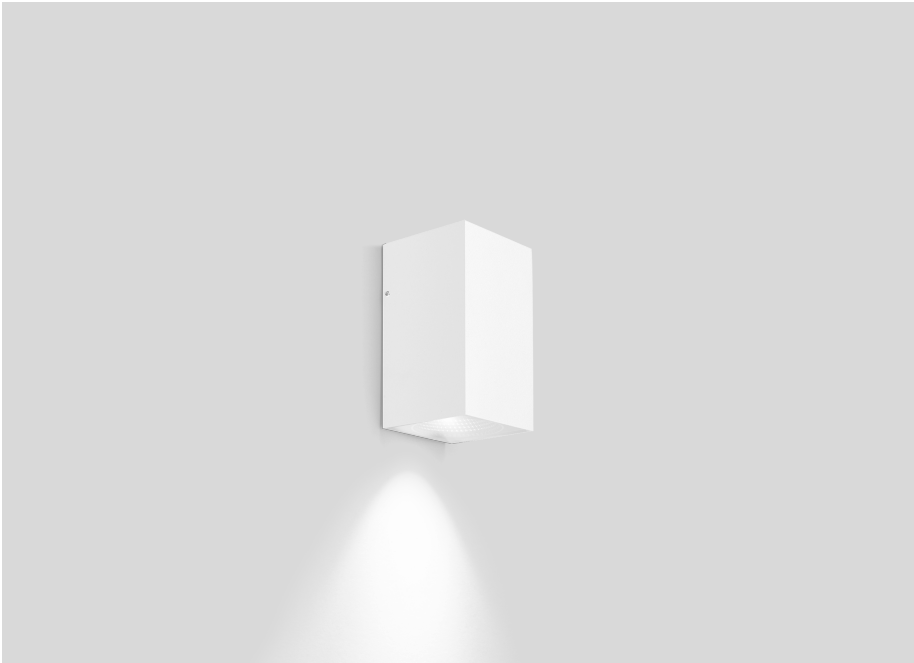

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

TRAIN 1.0

306668W5

CONE DIAGRAM

38°

h (m)	E0° (lx)	ø (m)
1	836	0.69
2	209	1.38
3	92	2.06
4	52	2.75
5	33	3.44