



WEVER & DUCRÉ
LIGHTING

TRAIN 2.0

306768L5

GENERAL

Wall

Surface

Aluminium Brushed

IP20

Interior

Indirect 255 lm

Direct 255 lm

Total 510 lm

LED

3000 K

CRI 90

L70 / 50000 h

3-step binning

PHYSICAL

Length 50 mm

Width 50 mm

Height 120 mm

0.35 kg

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 7.9 W

PC1

Safety distance 0.3 m



Project

Type


Notes

Quantity

Date

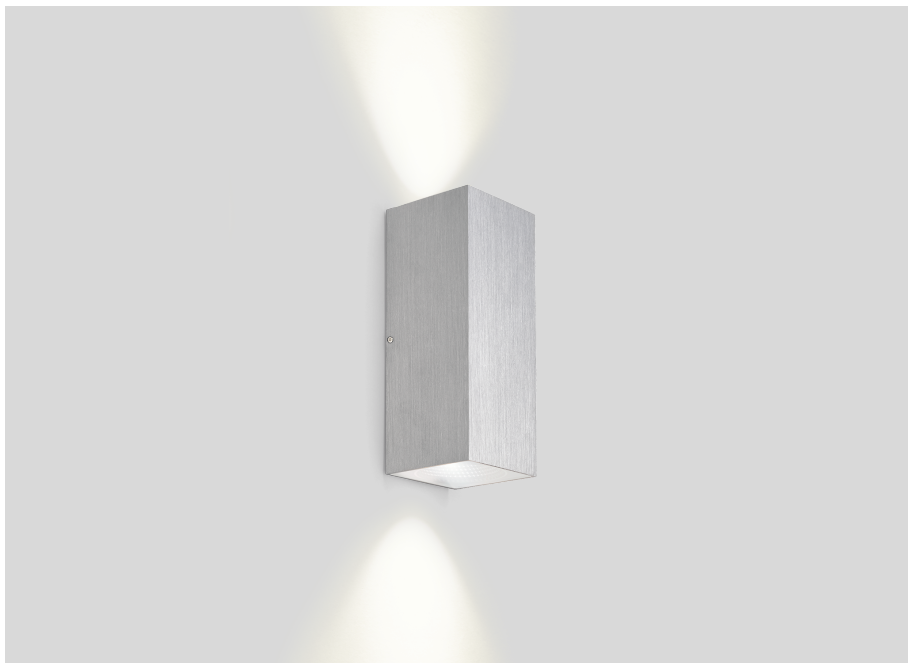

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

TRAIN 2.0

306768L5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.93	0.87	0.81	0.75	0.7
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.