

TRAIN 2.0

306768W5

GENERAL

Wall
Surface
Signal White
IP20
Interior
Indirect 255 lm
Direct 255 lm
Total 510 lm
9003 ^a

LED

3000 K
CRI 90
L70 / 50000 h
3-step binning

PHYSICAL

Length 50 mm
Width 50 mm
Height 120 mm
0.35 kg

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 7.9 W
PC1
Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.




Project _____

Type _____


Notes _____

Quantity _____

Date _____

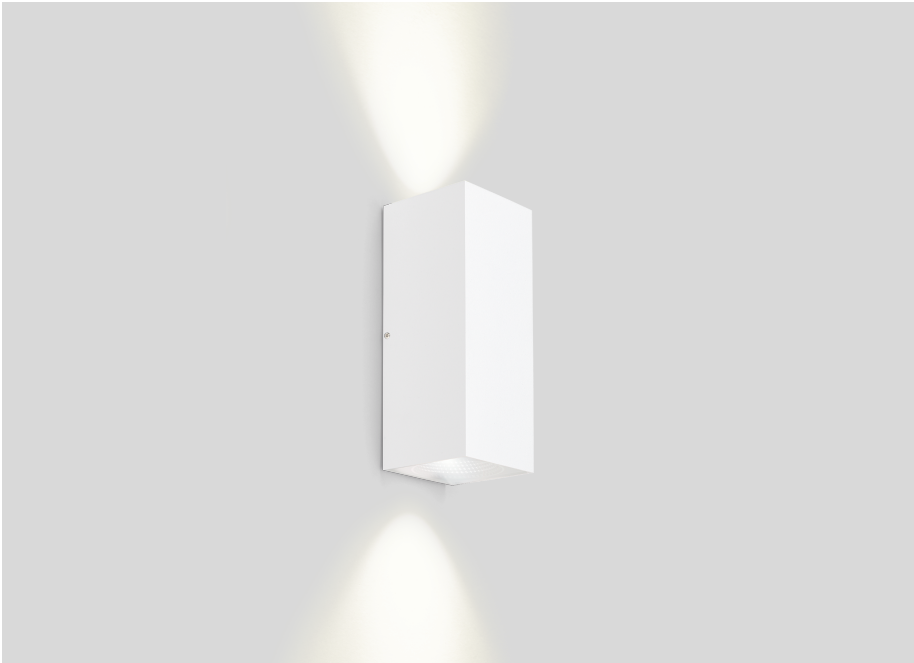

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

TRAIN 2.0

306768W5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.93	0.87	0.81	0.75	0.7
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.