





MIRBI long IP44



WALL SURFACE



223




313

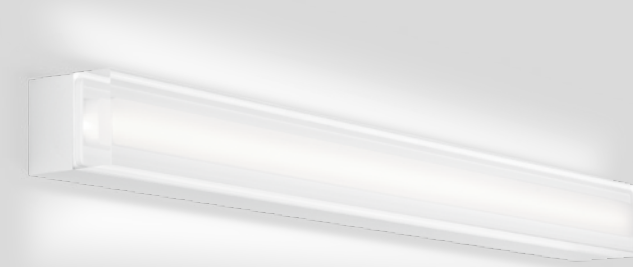

1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


⊕ IP44 SDCM3 L70|50K 0.72kg



2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


⊕ IP44 SDCM3 L70|50K 1.53kg



3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

⊕ IP44 SDCM3 L70|50K 2.25kg



outside clear,
inside opal
PMMA

Rev.001/2022-08

CODE	
□	329188W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 250/H 410 >90	3
3000K	L 280/H 460 >90	5

CODE	
□	329288W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 320/H 550 >90	3
3000K	L 365/H 620 >90	5

CODE	
□	329388W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 550/H 750 >90	3
3000K	L 610/H 840 >90	5