







# LINUS

## OUTDOOR FLOOR SURFACE

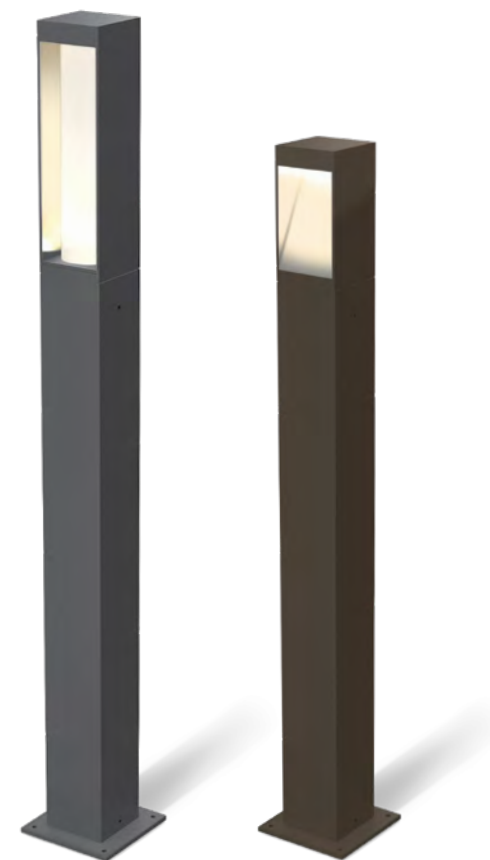

### 1.0

LED COB 7W | phase-cut dim  
220-240VAC | 50-60Hz  
aluminium powder coated

IP65 SDCM2 L70|50K 1.12kg

3000K | >90 CRI | 230lm

CODE
726178D5
726178A5
726178Q5

### ALWAYS USE

pole

CODE
150 910024_0
350 910026_0
550 910028_0

CODE
D
A
Q

order spike or fixation separately

### 2.0

LED COB 7W | phase-cut dim  
220-240VAC | 50-60Hz  
aluminium powder coated  
PMMA diffuser

IP65 SDCM2 L70|50K 1.10kg

3000K | >90 CRI | 230lm

CODE
726288D5
726288A5
726288Q5

### ALWAYS USE

pole

CODE
150 910024_0
350 910026_0
550 910028_0

CODE
D
A
Q

order spike or fixation separately

### 3.0

LED COB 7W | phase-cut dim  
220-240VAC | 50-60Hz  
aluminium powder coated

IP65 SDCM2 L70|50K 0.69kg

3000K | >90 CRI | 230lm

CODE
726378D5
726378A5
726378Q5

### ALWAYS USE

pole

CODE
150 910024_0
350 910026_0
550 910028_0

CODE
D
A
Q

order spike or fixation separately

### OPTIONAL

ground spike

CODE
90013103

ground fixation

CODE
90013302

specs on page 758