



# PRESENCE DETECTION HF SENSOR

300 90 311

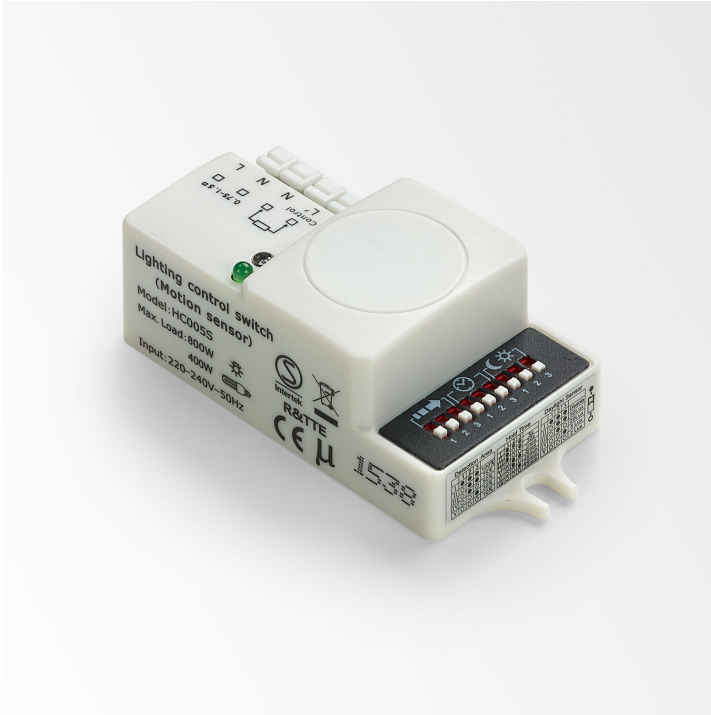

 [View on website](#)

**General info**

<b>LOCATION</b>	indoor
<b>INGRESS PROTECTION</b>	IP20
<b>WEIGHT (KG)</b>	0.1
<b>INFORMATION</b>	HIDDEN MOUNTING DUE TO RADAR SENSOR DETECTION ANGLE PRESENCE DETECTION: 30° - 150° WITH DAYLIGHT SENSOR HOLD TIME : 5 sec. - 30 min. MAX.6m MOUNTING HEIGHT MAX.400W (CAPACITIVE) / MAX.1200W (RESISTIVE)

For detailed installation instructions, please consult the manual: [300\\_90\\_311\\_HAND.pdf](#)

Notes: