



LEDSTRIP

COB linear

EE-COFS05

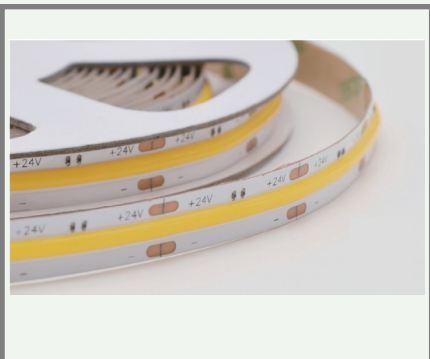

5W/m



2700K/3000k
4000K



575
lm/m



140°



Dimmable
PWM

TECHNICAL FEATURES


Power	5W/m
Input	24 Vdc
Dimmable	PWM
IP rating	20 / 65 / 67
Max. amb. Temp.	-20°C up to +40°C


LIGHTING CHARACTERISTICS

Light color	2700/3000/4000
Beam angle	140°
CRI	RA90+
Lumen output Lm/m	2700K: 500 lm/m 3000K: 525 lm/m 4000K: 575 lm/m
Efficiency Lm/w	2700K: 100 lm/w 3000K: 105 lm/w 4000K: 115 lm/w
LED's/m	480
LEDtype	COB linear
Lifetime	L80B20 50000h
SDCM	< 3

MEASUREMENTS AND MATERIAL FEATURES

Measurements	10 x 1.8 x 5000 mm
Cutable every...	5 cm

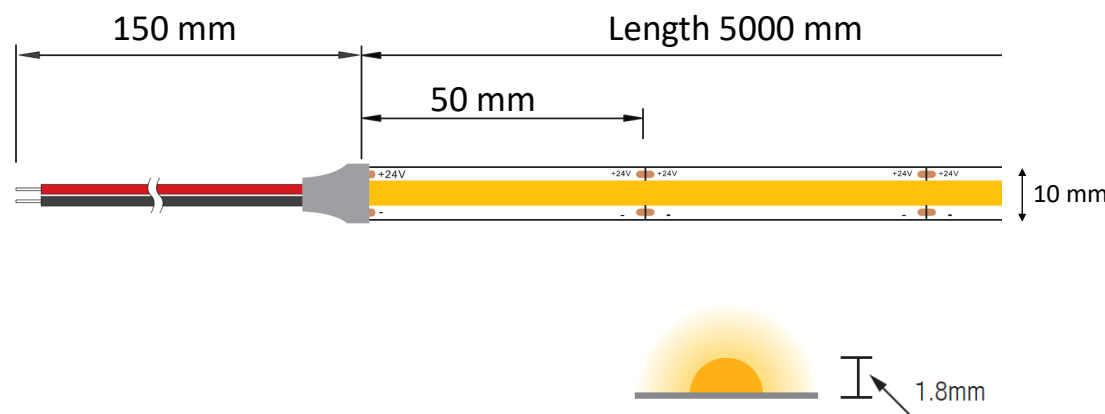

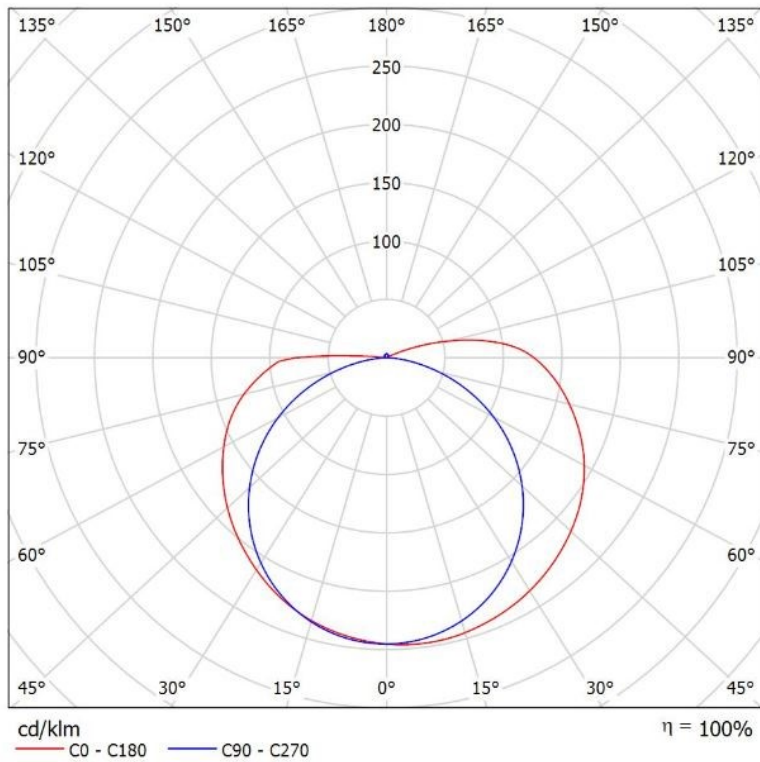

EE-COFS05

	PRODUCTTYPE	POWER	LIGHT COLOR	LENGTH	IP
EE	-COFS	05	/ 27	- 5	WP
	COB FLEXIBLE STRIP	WATT/M	KELVIN	M	WP waterproof IP65 N nanowaterproof IP67

SUMMARY PRODUCTCODES LEDSTRIP 5 WATT

- EE-COFS05/27-5
- EE-COFS05/30-5
- EE-COFS05/40-5
- EE-COFS05/27-5WP
- EE-COFS05/30-5WP
- EE-COFS05/40-5WP
- EE-COFS05/27-5N
- EE-COFS05/30-5N
- EE-COFS05/40-5N