


Profile/m

finish	
	952047
	952012
	952026




Straight Connection

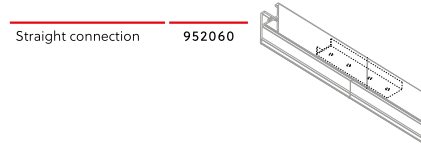


Endcap

finish	
	952247
	952212
	952226



Corner

Corner 90°	952070
Corner 135°	952080
Corner on request	952090



Diffuser/m

Polycarbonate Diffuser	952006
------------------------	--------




Mounting springs for surface installation

Spring	952905
--------	--------






2 mounting springs per m


Section view



Fixation on ceiling or wall

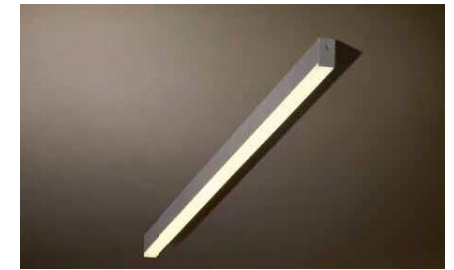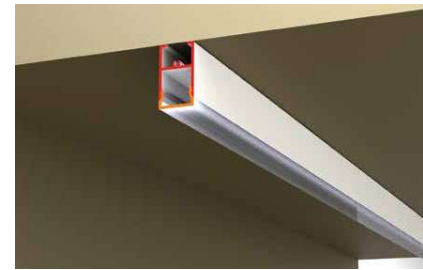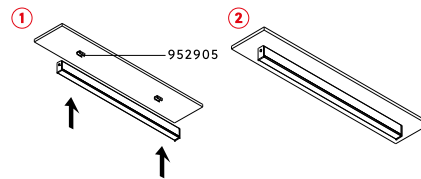

Module Ledline/m




24V DC



polycarbonate diffuser included




	2700K			3000K			4000K		
	medium power	high power	very high power	medium power	high power	very high power	medium power	high power	very high power
REFERENCE	952211	952251	952311	952221	952261	952321	952231	952271	952331
power	9,6W/m	14,4W/m	19,2W/m	9,6W/m	14,4W/m	19,2W/m	9,6W/m	14,4W/m	19,2W/m
lumen output	672 lm/m	1010 lm/m	2208lm/m	710 lm/m	1060 lm/m	2208lm/m	740 lm/m	1100 lm/m	2323lm/m
CRI	92	92	92	92	92	92	92	92	92
max. length 1 powerfeed	5 metres	5 metres	5 metres	5 metres	5 metres	5 metres	5 metres	5 metres	5 metres
min. cutting length	50 mm	33,33 mm	33,33 mm	50 mm	33,33 mm	33,33 mm	50 mm	33,33 mm	33,33 mm

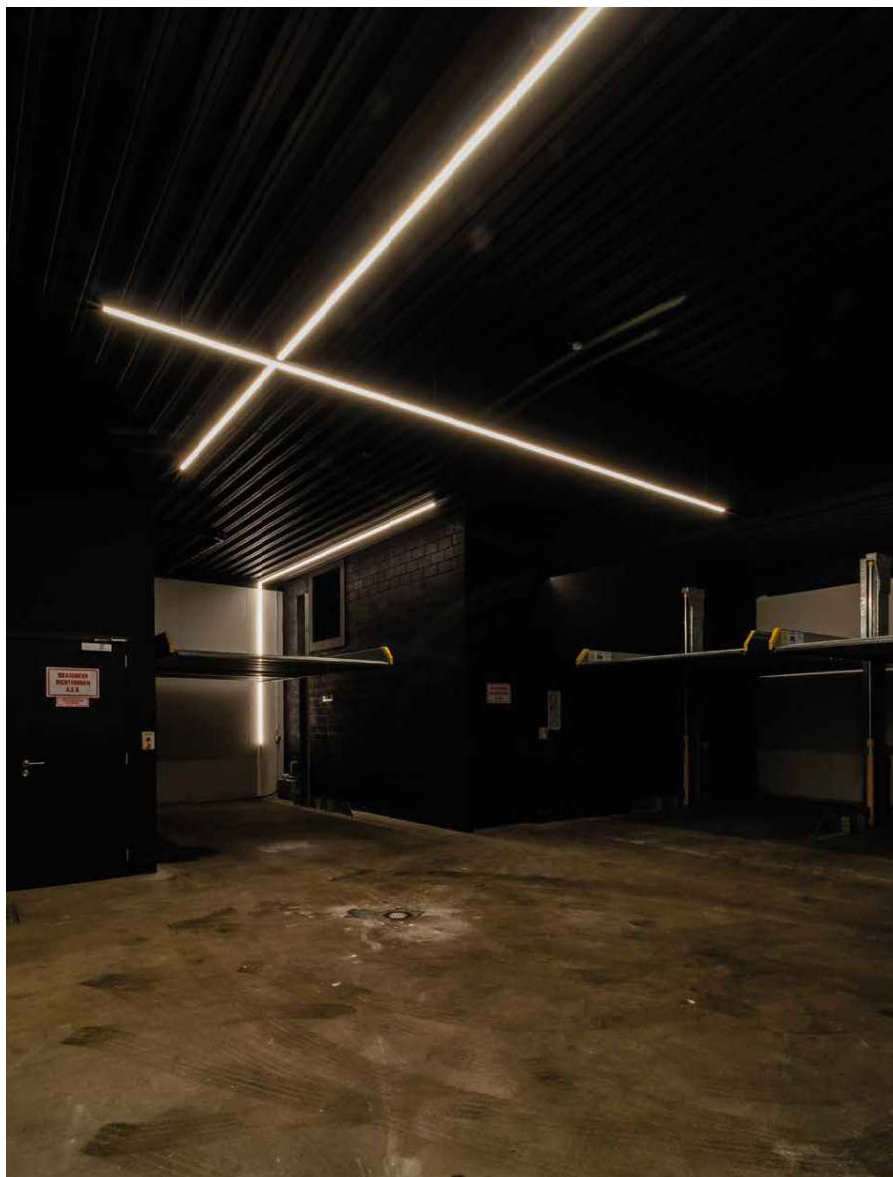
Converter matrix, see back flap



Korpoort Ghent



Suspension Single

finish	2,25m	4 m	6 m
	952041	952021	952051
	952040	952020	952050
	952042	952022	952052





1 suspension/ 1,5 m profil
min. 2 suspensions


Connection Set Square

finish	2 P		
	2,25 m	4 m	6 m
	691050	691150	691250
	691039	691139	691239





Connection Set Round

finish	2 P		
	2,25 m	4 m	6 m
	691049	691149	691249
	691038	691138	691238



Connection Set Kosmos (recessed)

finish	2P		
	2,25 m	4m	6 m
	691048	691148	691248
	691037	691137	691237



56 mm
Installation depth 60 mm

1 Can be used as access point for converter

1 Can be used as access point for converter



Korpoort Ghent

How to compose 1U

REQUEST CUSTOMER

SLIM PROFILE 2 M
 WHITE COLOR
 LED 2700K HP 24V
 INSTALLED ON CEILING
 + CONVERTOR


TAL

Orderform

REF	DESCRIPTION	PCS/M
952047	PROFILE TEXT WHITE	2
952247	ENDCAP TEXT WHITE	2
952251	MODULE LEDLINE 2700 HP	2
952905	MOUNTING SPRING	3
40070	CONVERTER 35W 24V	1

Drawing

TOP VIEW

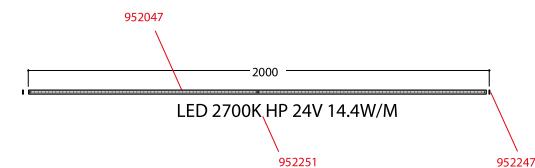

Section view

