


2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.92kg

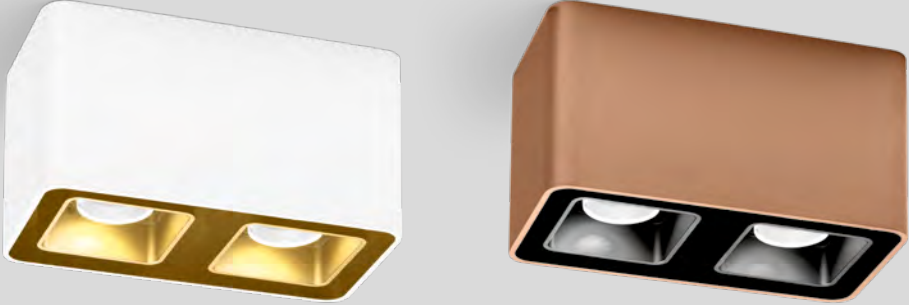

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.01kg

	CODE
	186458W_
	186458L_
	186458G_
	186458P_
	186458B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x670 >90	3
3000K	2x700 >90	5
2000-3000K	2x470 >90	9

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743

DOCUS
CEILING SURFACE