

INSTALLATION GUIDE ———>






LIGHT-POINT

WE BELIEVE IN CREATING LIGHT

At LIGHT-POINT we have one goal - to improve the everyday **life** of people all over the world. Our lamps are designed to provide inspiration, and to solve everyday needs, be it lighting your home **interior**, your office or public spaces. Our **design** is not driven by current trends, since we believe that a classic, minimalistic design with the right function will last for generations and bring **character** into any **environment**.

SKY

Design: LP Design Team

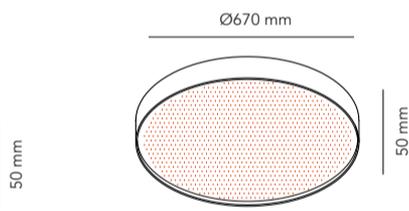

FOUNDER


Ronni Gol had a decisive influence on how we experience the world around us and interact with one another. We are fortunate enough to live in a world, where we as consumers can choose to switch between night and day according to our whims. In short, we can construct the exact life suiting our individuality, because we are not dependent on daylight to be able to function, and can for instance choose to work at night and sleep during the day. This places great demands on how we approach future light solutions, and the possibilities for innovation when developing a lighting product.



Art. name	Sky 265	Sky 365	Sky 465	Sky 675	Sky 950
Art. no. white	257720	257723	257726	257729	257732
Art no. black	N/A	N/A	N/A	N/A	N/A
EAN white	5711389577209	5711389577230	5711389577261	5711389577292	5711389577322
EAN black	N/A	N/A	N/A	N/A	N/A
RAL white	9003	9003	9003	9003	9003
RAL black	N/A	N/A	Fill out N/A	N/A	N/A
Material	Aluminium/Acrylic	Aluminium/Acrylic	Aluminium/Acrylic	Aluminium/Acrylic	Aluminium/Acrylic



ENERGY LABEL

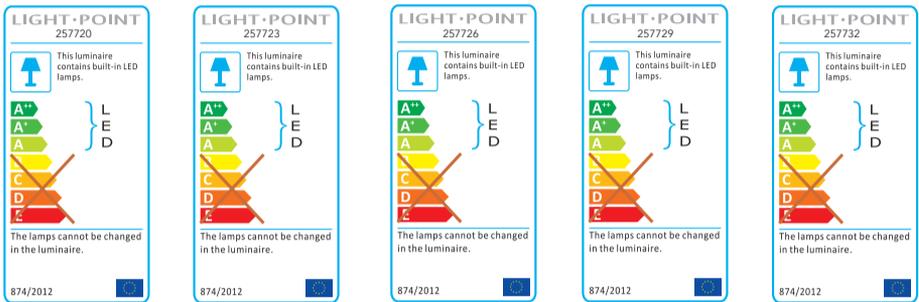

DIMMING

Art. name	Sky 265	Sky 365	Sky 465	Sky 670	Sky 950
Light source	Edison	Edison	Edison	Edison	Edison
Lifetime	50.000	50.000	50.000	50.000	50.000
Number of light	1	1	1	1	1
Electronic gear	N/A	N/A	N/A	N/A	N/A
Driver watt	N/A	N/A	N/A	N/A	N/A
Light source watt	18	24	30	40	80
System watt	18	24	30	40	80
Voltage	220-240	220-240	220-240	220-240	220-240
Dimmable	Yes	Yes	Yes	Yes	Yes
Lumen output	1530	2040	2550	3400	6800
Lumen pr. watt	85	85	85	85	85
Flux	N/A	N/A	N/A	N/A	N/A
CCT (K)	3000	3000	3000	3000	3000
RA/CRI	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90
Mac Adam	6	6	6	6	6
Light Distribution	Direct	Direct	Direct	Direct	Direct
Beaming angle	N/A	N/A	N/A	N/A	N/A
Tilt angle	N/A	N/A	N/A	N/A	N/A
Cut out mm.	Ø 255	Ø 355	Ø 455	Ø 665	Ø 925
Rotation	N/A	N/A	N/A	N/A	N/A
Looping	Yes	Yes	Yes	Yes	Yes

INSTALLATION GUIDE

INSTALLATION INSTRUCTION

- Before installing, make sure the power supply is switched off.
- Follow the steps as the figure for installation or replacement of bulb Step.
 - after holing, pull out the wires.
 - fix the mounting bracket onto the wall with screws.
 - connect the wires to the terminal block.
 - slide the fixture to the mounting bracket
- After finishing every step, tighten the screws, have the fixture fixed, and then connect the power supply.

CLEANING INSTRUCTION

- Before cleaning, ensure that the power supply is switched off.
- Use only a soft cloth to clean the lamp, dampened with mild cleanser if needed for resistant dirt.
- Warning: do not use alcohol or other solvents.

CAUTION:

In case of any doubt, please contact the qualified electrician.

MOUNTING

SKY 265 HOLE SIZE: Ø255mm
 SKY 365 HOLE SIZE: Ø355mm
 SKY 465 HOLE SIZE: Ø455mm
 SKY 670 HOLE SIZE: Ø655mm
 SKY 950 HOLE SIZE: Ø925mm

Step D.

