



PIRRO OPAL




CEILING SURFACE



p. 189



p. 409

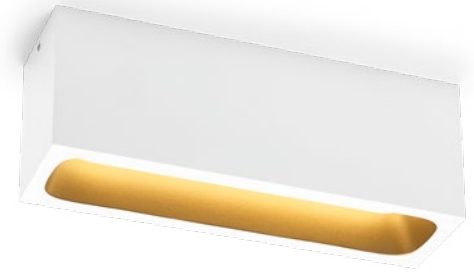

2.0

LED 7W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.30kg IP20 $\text{S} \approx 0.3 \cdot \text{D}$

CODE	
	151281E_
	151281J_
	151281K_
	151281B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5

4.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.52kg IP20 $\text{S} \approx 0.3 \cdot \text{D}$

CODE	
	151481E_
	151481J_
	151481K_
	151481B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

available from summer 2021