


BEGA**84 835**

BEGA UniLink Garden floodlight

IP 65

Project · Reference number

Date

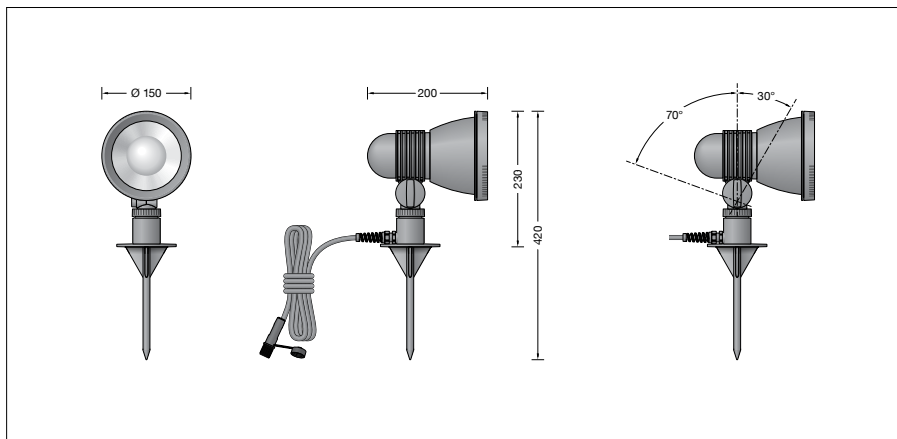

Product data sheet

Application

Portable garden floodlight BEGA UniLink with 5 m connecting cable and plug connector. A separate mains plug must be ordered in order to connect the floodlight to the mains. The various country-specific mains plugs with 0.5 m connecting cable, as well as extension cables and five-way distribution boxes are available as accessories.

Product description

Housing and earth spike made of glass-fibre reinforced polyamide
Clear safety glass
Silicone gasket
Reflector made of pure anodised aluminium
Toolless relamping
No tools are needed to adjust the operating position
Swivel range $-30^{\circ}/+70^{\circ}$
5 m mains supply cable
X05RN-F FEP $2 \times 1^{\square} + 1G2,5^{\square}$ with plug-in connector
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical impacts < 2 joule
CE – Conformity mark
Weight: 1.4 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 40 W

Supplied lamp

BEGA LED lamp **13588**
LED Retrofit 8 W · 1055 lm · 3000 K

Luminaire efficiency: 48.8%

Additional BEGA LED lamps are available for this luminaire:

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K
dimmmable
13590 LED 12 W · 1400 lm · 3000 K
13592 LED 12 W · 1400 lm · 3000 K
dimmmable

Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimmmable
13556 LED 9 W · 805 lm · 2700-6500 K
dimmmable · tunable white
13557 LED 9.5 W · 805 lm · 2700-6500 K
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Lighting technology

Symmetrical wide beam light
distribution
Half beam angle 93°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Accessories

0.5 m connecting cable with country-specific mains plugs

71180 Plug type F / E: system common in Germany and Europe
71181 Plug type G: system used in Great Britain ("Commonwealth plug")
71182 Plug type J: system common in Switzerland and Liechtenstein
71183 Plug type L: system common in Italy and Greece
71184 Plug type K: system common in Denmark and Greenland

71186 BEGA UniLink Extension cable 5 m
71187 BEGA UniLink Extension cable 10 m
71188 BEGA UniLink Extension cable 20 m

71247 Connecting cable 5 m
with free line ends
71256 Connecting cable 0.5 m
with free line ends

71189 BEGA UniLink Five-way distribution box

For the accessories a separate instructions for use can be provided upon request.

Light distribution

