
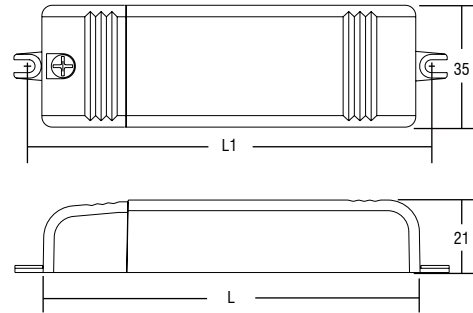


Trasformatori elettronici dimmerabili (regolazione IGBT - TRIAC) Dimmable electronic transformers (TRAILING EDGE - LEADING EDGE)



Articolo Article	Codice Code	W	Volt V	Volt out	ta °C	tc °C	λ	Lunghezza Length L	Fissaggio Fixing L1	Colori Colours	Peso Weight gr.	Confezioni Box
PICO WOLF 105	119659	20 ÷ 105	230 ÷ 240	11,5-12	-20 +55	95	0,98	107	118	Nero - Black	80	30

Norme di riferimento

Reference Norms:

EN 55015
EN 60598-1
EN 61000-3-2
EN 61047
EN 61347-1
EN 61347-2-2
EN 61547
VDE 0710-T14

Tensione Voltage

230 ÷ 240 V

Frequenza Frequency

50...60 Hz

Potenza Power

20 ÷ 105 W

- Trasformatore indipendente IP20, per lampade alogene 12 V.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fornito di coprimorsetto e fissacavo.
- Morsetti di entrata e uscita sullo stesso lato (sezione morsetto 2,5 mm²).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 8 mm.
- Sguainatura dei cavi max. 18 mm.
- Fissaggio del trasformatore tramite asole per viti.
- Dimensioni ultra compatte.
- Protezioni:
 - termica e al corto circuito.
 - contro le extra tensioni di rete.
 - contro i sovraccarichi.

Regolabili con dimmer TCI:

DU 250 - TED 700 - TD REG - X-DIM.IGBT.

- IP20 independent transformer, for halogen lamps 12 V.
- Class II protection against electric shock following direct and indirect contact.
- Supplied with terminal cover and cable retainer.
- Input and output terminal blocks on the same side (terminal area 2,5 mm²).
- Clamping screws on primary and secondary circuits for cables with diameter: 3 mm. min. – 8 mm. max.
- Cable unsheathing 18 mm. max.
- The transformer can be secured with slot for screws.
- Ultra compact size.
- Protections:
 - against overheating and short circuits.
 - against mains voltage spikes.
 - against overloads.

Regulation with TCI dimmer:

DU 250 - TED 700 - TD REG - X-DIM.IGBT.