



Super-thin Electromagnetic Built-in Transformers with Thermal Cut-out 20–105 VA

Shape: 28 x 41 mm


Electromagnetic safety transformers
for low-voltage halogen incandescent lamps 12 V
Vacuum-impregnated with polyester resin
Screw terminals: 0.5–2.5 mm²
Protection class I
Temperature switch with self-holding protection
against overheating,
no primary fuse necessary

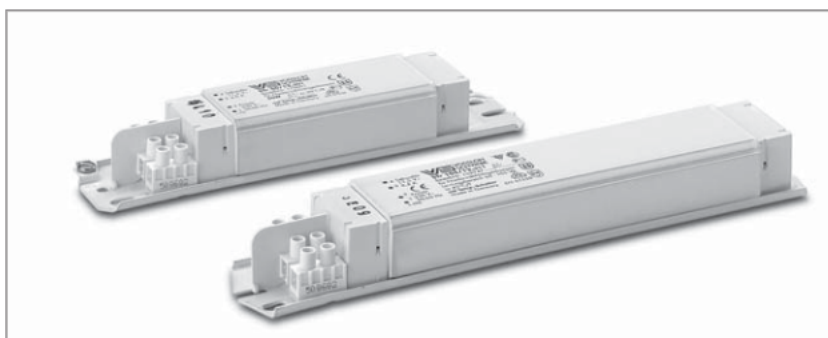

A

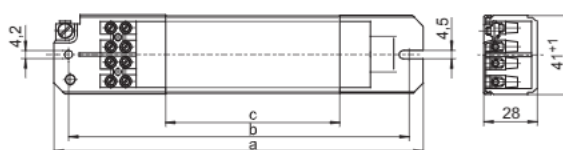

B

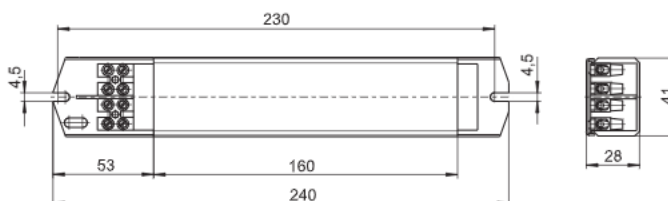

Type	Ref. No.	Capacity range W	50, 60 Hz		Ambient temperature t_g (°C)	Drawing	a mm	b mm	c mm	Weight kg
			V prim.	V sec.						
230 V/50, 60 Hz										
STr 20/12.306	161860	15–20	230	11.5	60/B	A	155	140	63	0.55
STr 50/12.337	179444	35–50	230	11.5	50/F	A	175	165	83	0.73
STr 50/12.301	170091	35–50	230	11.5	50/B	A	195	180	92	0.80
STr 60/12.338	179608	40–60	230	11.5	50/F	A	195	180	92	0.80
STr 105/12.311	169747	60–105	230	11.5	45/F	B	240	230	160	1.33
240 V/50, 60 Hz										
STr 50/12.401	169748	35–50	240	11.5	45/B	A	195	180	92	0.80
STr 105/12.406	161935	60–105	240	11.5	50/H	B	240	230	160	1.33
127 V/60 Hz										
STr 50/12.109	537403	35–50	127	11.5	40/F	A	155	140	63	0.55

1

2

3

4

5

6

7

8

9

10