


Date
Customer
Project
Type

Shellby Recessed 184 1x IP55 LED 3000K DE White Structure





Shellby's light is the Sun by day, and the Moon by night. Like the Sun, it brings powerful, general light that indisputably brightens your space, and energises you for daily activities. Like the Moon, it watches, with softer light that inspires calm and warmth. A clash of functions, all in one.

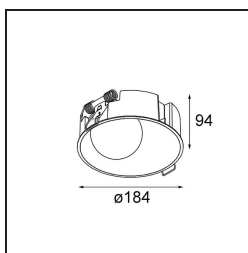


Specifications

Material	12180109
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	48 80 96 100 52
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø177
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	1080.0
Drive current (mA)	350 500 700
Forward voltage (Vf)	16,4 16,9 17,7
Connected load (W)	5,7 8,5 12,4
Delivered lumens (lm)	383 516 668
Efficacy (lm/W)	67 61 54
Glare rating	29 30 31

TM30 & CRI diagram

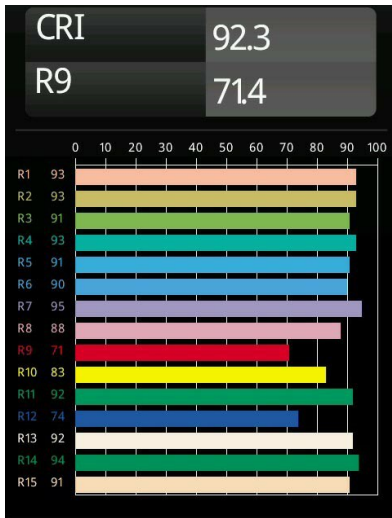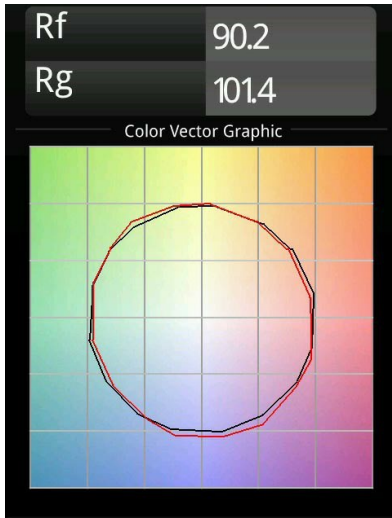


Light distribution & beam diagram

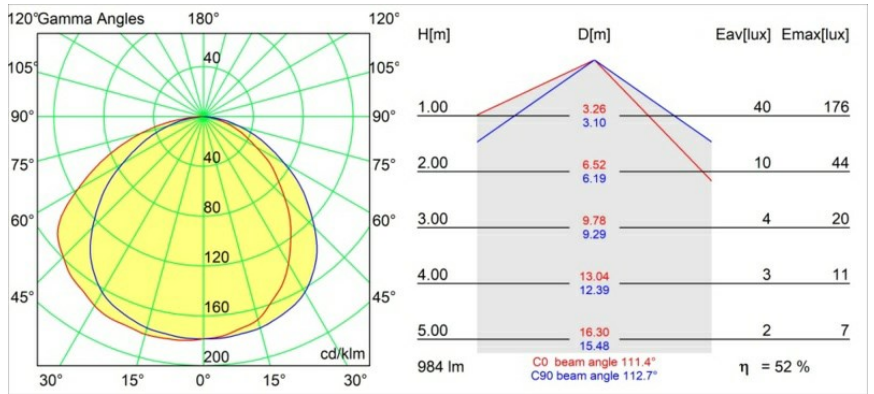


Diagrams

Decorative Accessories

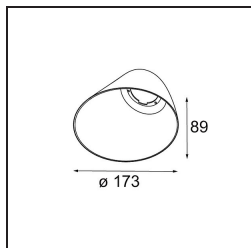


- 12183082** Shellby skin ano bronze
- 12183041** Shellby skin ano champagne
- 12183042** Shellby skin ano gold
- 12183092** Shellby skin pearly white
- 12183084** Shellby skin ano silver bronze

Installation Accessories

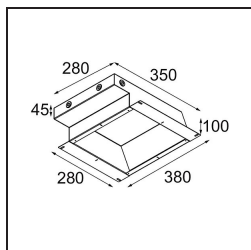

- 12182030** Conbox 280x350x100x380

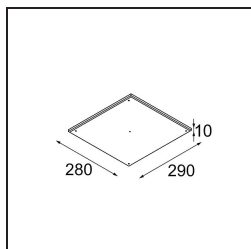

- 12293030** Gypsum fibreboard 290x280

Choose a required accessory