

FLOS

■ F6564031 Dark Green

Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011



9W - 347lm - 2700K - CRI> 90

Floor luminaire providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation $\pm 90^\circ$.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607006580
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	9
System flux (lm)	347

Physical

Colour	Dark Green
Length (mm)	240
Net weight (kg)	1.9
Package height (mm)	160
Package width (mm)	330
Package length (mm)	1210
Package volume (m3)	0.06
IP internal	20



Download

- [Mounting instructions](#) PDF
- [Mounting instructions](#) PDF
- [Spare Parts](#) PDF

Photometric Files

- [LDT / IES](#) LDT


Technical Drawings

- [2D](#) ZIP
- [3D](#) ZIP



IP
20

Schematic light drawing



Photometric

Light distribution	Asymmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	No
Dimming type	Electronic 24V
Dimming interface	Switch Integrated (Not Dimmable)
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

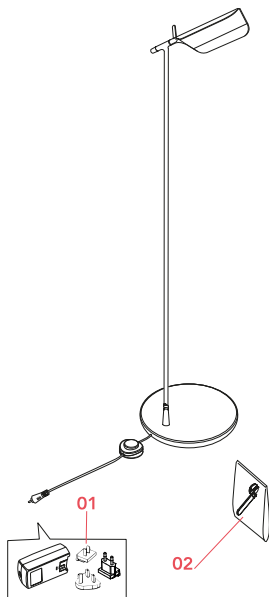

01. Black plug assembly kit & 24V driver RF3320100

02. Locking key tool RF13905

DOWNLOAD



RF3320100
Black plug assembly kit & 24V
driver



RF13905
Locking key tool
driver