

## PUNTO Ø 250/320/420 mm Mounted lamps (ext. control gear)



### Product description

Art. No.: 4050.320.27.8

Product name: PUNTO mounted lamp/ext. control gear

Housing colour: grey RAL 9006

Material: Diecast aluminium

Equipment: Can be mounted on the wall or ceiling, for indoor or outdoor use (protected from rain)

Dimensions (mm): Ø320 x 50

Optics/light technology: acrylic glass diffuser fine mat

Weight: 2.28

Protection level: IP 54

Protection class: III

Control gear: PS 230 V/50 Hz, constant current 500 mA (order separately)

### Light specification/technical data

Lamp: LED

System power: 11

Light flux: 1560

Luminous efficiency (lm/W): 142

Colour temperature (K): 2700

Colour rendering index: >90

Unified glare rating: 22

Light distribution: Direct beam

Lifetime: 100'000h L80 B10 (Ta 25° C)


Energy efficiency: D

Colour consistency (MacAdam): 3

**Specification text/Description:** Article: 4050.320.27.8; Article name: PUNTO mounted lamp/ext. control gear; Description: With very high luminous efficiency and low glare, PUNTO provides perfect uniformity of light and offers a wide range of applications. The diffuser, sealed against dust and moisture, allows for long-term use in indoor and sheltered outdoor areas. The patented quick mounting system means easy mounting on the walls and ceilings.; Color: grey RAL 9006; Optics: acrylic glass diffuser fine mat; Watt: 11W; Kelvin: 2700K; Lumen: 1560lm; Materialisation: aluminium; Control gear: constant current 500mA; CRI: >90; Protection class: III; Protection level: IP 54; UGR: 22; Weight (incl. packaging): 2,28kg; ø: 320mm; Dimension (mm): Ø320 x 50mm

### Drawings

Art. No.: 4050.320.27.8

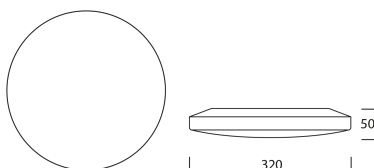

**Light distribution**

