

PUNTO Ø 250/320/420 mm Mounted lamps



Product description

Art. No.: 4051.320.30.8 DIG
 Product name: PUNTO mounted lamp
 Housing colour: grey RAL 9006
 Material: Diecast aluminium
 Equipment: Can be mounted on the ceiling or wall with plug connection
 Dimensions (mm): Ø320 x 70
 Optics/light technology: acrylic glass diffuser fine mat
 Weight: 2.72
 Protection level: IP 34
 Protection class: I
 Control gear: PS 230 V/50 Hz
 Lighting control: DALI/TouchDIM


Light specification/technical data

Lamp: LED
 System power: 13
 Light flux: 1630
 Luminous efficiency (lm/W): 125
 Colour temperature (K): 3000
 Colour rendering index: >90
 Unified glare rating: 22
 Light distribution: Direct beam
 Lifetime: 100'000h L80 B10 (Ta 25° C)
 Energy efficiency: D
 Colour consistency (MacAdam): 3

Specification text/Description: Article: 4051.320.30.8 DIG; Article name: PUNTO mounted lamp; Description: With very high luminous efficiency and low glare, PUNTO provides perfect uniformity of light and offers a wide range of applications. The diffuser, sealed against dust and moisture, allows for long-term use in indoor and sheltered outdoor areas. The patented quick mounting system means easy mounting on the walls and ceilings.; Color: grey RAL 9006; Optics: acrylic glass diffuser fine mat; Light control: DALI/TouchDIM; Watt: 13W; Kelvin: 3000K; Lumen: 1630lm; Materialisation: aluminium; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 34; UGR: 22; Weight (incl. packaging): 2,72kg; ø: 320mm; Dimension (mm): Ø320 x 70mm

Drawings

Art. No.: 4051.320.30.8 DIG

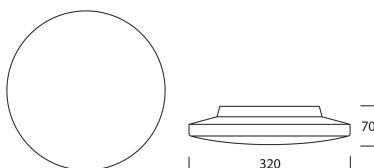

Light distribution

