

## KIVO with lens optics Ø 140 mm Ceiling lamps (ext. control gear)



### Product description

Art. No.: 4123.120.40.2  
Product name: KIVO ceiling lamp/ext. control gear  
Housing colour: black RAL 9005  
Material: Diecast aluminium  
Equipment: For mounting on the ceiling  
Dimensions (mm): Ø140 x 43  
Optics/light technology: glass lens  
Beam angle (°): 60  
Weight (kg): 0.90  
Protection level: IP 43  
Protection class: I  
Control gear: EB 230 V/50 Hz, constant current 350 mA, order separately

### Accessories

Art. No.: 4111.120.02.2  
Product name: KIVO interchangeable shades  
Colour: black RAL 9005  
Dimensions (mm): Ø126 x 18


### Light specification/technical data

Lamp: LED  
System power (W): 12  
Light flux (lm): 1350  
Luminous efficiency (lm/W): 113  
Colour temperature (K): 4000  
Colour rendering index (CRI): >90  
Unified glare rating (UGR): 19  
Light distribution: Direct beam  
Lifetime: 100'000h L80 B10 (Ta 25° C)  
Energy efficiency: D  
Colour consistency (MacAdam): 2


**Specification text/Description:** Article: 4123.120.40.2; Article name: KIVO ceiling lamp/ext. control gear; Description: The smaller KIVO version with its diameter of 140 mm has a compact design and impresses with its comprehensive flexibility of use for a wide range of lighting requirements. Tailored to the spatial requirements, the luminaires impress with their high lighting aesthetics. With understated appearance, they are ideally suited as individual luminaires for residential and commercial spaces. As a group they are attractive eye-catchers in the individual interior design.; Color: black RAL 9005; Optics: glass lens; Watt: 12W; Kelvin: 4000K; Lumen: 1350lm; Materialisation: aluminium; Control gear: constant current 350mA; CRI: >90; Δ °: 60°; Protection class: I; Protection level: IP 43; UGR: 19; Weight (incl. packaging): 0,9kg; ø: 140mm; Dimension (mm): Ø140 x 43mm

### Drawings

Art. No.: 4123.120.40.2



## Light distribution

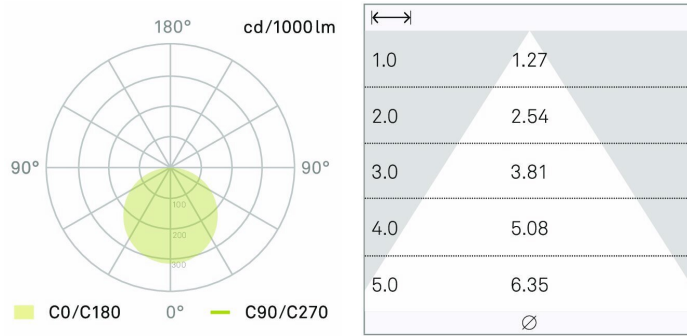

## Specifications

