

KIVO with lens optics Ø 140 mm Ceiling lamps (AC 230V)



Product description

Art. No.: 4123.120.27.2 D
 Product name: KIVO ceiling lamp
 Housing colour: black RAL 9005
 Material: Diecast aluminium
 Equipment: For mounting on the ceiling and connection to 230 V
 AC / 50 Hz mains voltage, dimmable via LED phase dimmer
 Dimensions (mm): Ø140 x 43
 Optics/light technology: glass lens
 Beam angle (°): 60
 Weight (kg): 0.90
 Protection level: IP 43
 Protection class: I
 Lighting control: dimmable via LED phase dimmer

Accessories

Art. No.: 4111.120.02.2
 Product name: KIVO interchangeable shades
 Colour: black RAL 9005
 Dimensions (mm): Ø126 x 18


Light specification/technical data

Lamp: LED
 System power (W): 12
 Light flux (lm): 920
 Luminous efficiency (lm/W): 77
 Colour temperature (K): 2700
 Colour rendering index (CRI): >90
 Unified glare rating (UGR): 16
 Light distribution: Direct beam
 Lifetime: 50'000h L80 B10 (Ta 25° C)
 Energy efficiency: F
 Colour consistency (MacAdam): 2


Specification text/Description: Article: 4123.120.27.2 D; Article name: KIVO ceiling lamp; Description: The smaller KIVO version with its diameter of 140 mm has a compact design and impresses with its comprehensive flexibility of use for a wide range of lighting requirements. Tailored to the spatial requirements, the luminaires impress with their high lighting aesthetics. With understated appearance, they are ideally suited as individual luminaires for residential and commercial spaces. As a group they are attractive eye-catchers in the individual interior design.; Color: black RAL 9005; Optics: glass lens; Light control: dimmable via LED phase dimmer; Watt: 12W; Kelvin: 2700K; Lumen: 920lm; Materialisation: aluminium; Control gear: 230 V AC/50 Hz; CRI: >90; Δ °: 60°; Protection class: I; Protection level: IP 43; UGR: 16; Weight (incl. packaging): 0,9kg; ø: 140mm; Dimension (mm): Ø140 x 43mm

Drawings

Art. No.: 4123.120.27.2 D



Light distribution

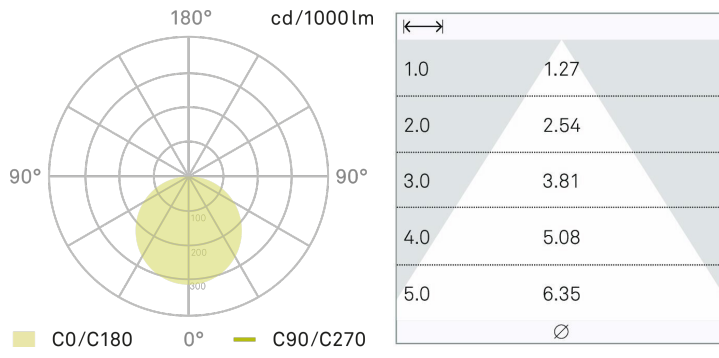

Specifications

