


lin poller

instructions for use

1. Conduct customer's underground cable through PG fitting on the bottom of the lin box and connect it with included WAGO-connectors.
2. Lin box has to be screwed on an even foundation with the included fixing material; where necessary prepare a drainage system. Ensure a secure position and flushness with FFL (finished floor level).
3. Connect luminaire cable of luminaire body with included WAGO-connectors.
4. Position the luminaire body including the threaded plate on the lin box and screw it with the 4 screws.

Installation: In case of through wiring, blanking plug has to be removed and replaced by the included PG fitting.

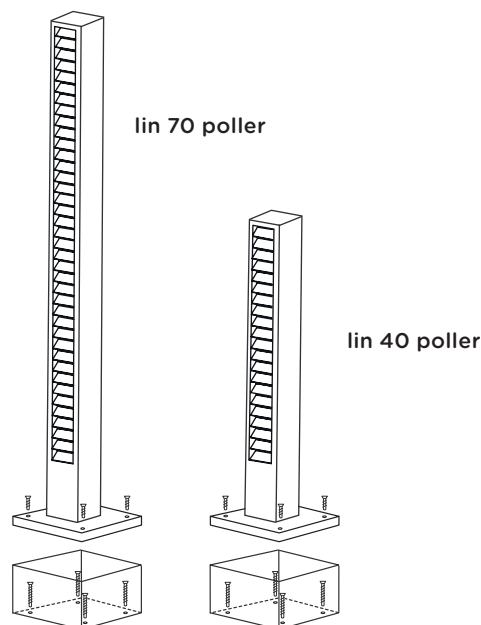

light technology:

230V Power LED / 2700K

system performance:

lin 40 poller: 9 W/164 lm

lin 70 poller: 18 W/328 lm


 A+ EEC

technical information:

operating voltage 230V / 50Hz

 IP65 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 CE conformity mark

maintenance:

Disconnect the electrical installation.

This luminaire contains built-in LED lamps. The LED lamps can be replaced by IP44.de in case of a failure of the LED. In this case, please get in touch with your retailer.

dimming:

The luminaire can be dimmed with an approved leading- or trailing edge dimmer. Please contact IP44.de service center for a list of approved dimmers.

care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning. Please note care instructions at www.IP44.de.

safety:

We point out that the electric connection of light fixtures has to be done by a certified installer. We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the luminaire will result in loss of warranty.

assembly instruction:

The luminaire may not come into contact with highly acidic or alkaline soils, or with other aggressive substances, chemicals or fertilizers.