



LEDSTRIP

COB linear

EE-COFS15

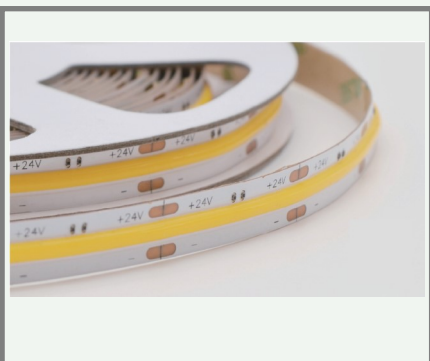

15W/m



2700K/3000k
4000K



1725
lm/m



140°



Dimmable
PWM

TECHNICAL FEATURES


Power	15W/m
Input current	24 Vdc
Dimmable	PWM
IP rating	20 / 65 / 67
Max. amb. Temp.	-20°C up to +40°C


MEASUREMENTS AND MATERIAL FEATURES

Measurements	10 x 1.8 x 5000 mm
Cutable every...	5 cm

LIGHTING CHARACTERISTICS

Light color	2700/3000/4000k
Beam angle	140°
CRI	RA90+
Lumen output	2700K: 1500 lm/m 3000K: 1575 lm/m 4000K: 1725 lm/m
Efficiency lm/w	2700K: 100 lm/w 3000K: 105 lm/w 4000K: 115 lm/w
LED's/m	480
LEDtype	COB lineair
Lifetime	L80B20 50000h
SDCM	< 3

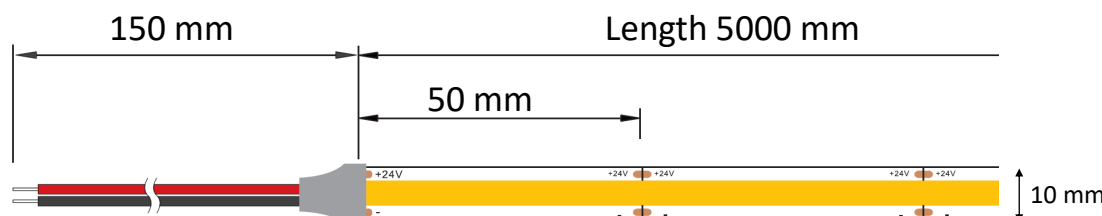

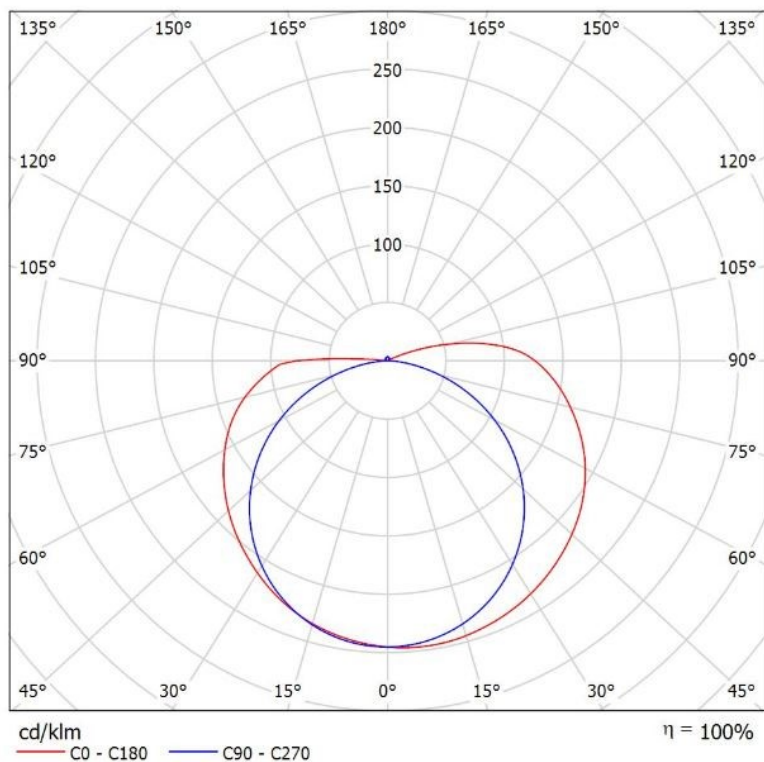

EE-COFS15

	PRODUCTTYPE	POWER	LIGHT COLOR	LENGTH	IP
EE	-COFS	15	/ 27	- 5	WP
	COB FLEXIBLE STRIP	WATT/M	KELVIN	M	

SUMMARY PRODUCTCODES LEDSTRIP 15 WATT

- EE-COFS15/27-5
- EE-COFS15/30-5
- EE-COFS15/40-5
- EE-COFS15/27-5WP
- EE-COFS15/30-5WP
- EE-COFS15/40-5WP
- EE-COFS15/27-5N
- EE-COFS15/30-5N
- EE-COFS15/40-5N