


FEMTOLINE 25 T & TP

www.deltalight.com/femtoline25t
www.deltalight.com/femtoline25tp



1
PROFILE CONSTRUCTION

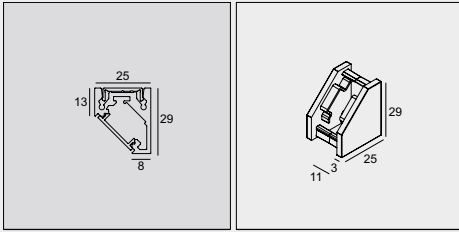

FTL25 T - PROFILE

◇ ANO / B / W


INCL.PC SBL
INCL.FIXATION CLIP
MAX.L / PROFILE: 6m
[0,7] / m

FTL25 T - END CAP SET


◇ A / B / W

SET OF 2 PCS
[0,2]

2
PROFILE FIXATION



1
PROFILE CONSTRUCTION

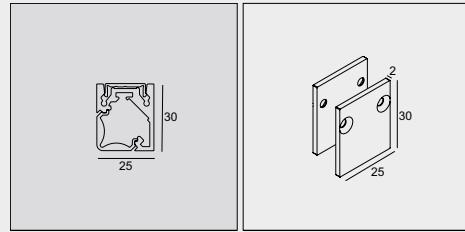

FTL25 TP - PROFILE

◇ ANO / B / W


INCL.PC SBL
INCL.FIXATION CLIP
MAX.L / PROFILE: 6m
[0,4] / m

FTL25 TP - END CAP SET

◇ A / B / W

SET OF 2 PCS
[0,2]

2
PROFILE FIXATION



PRO

3
PROFILE CONNECTION

3
PROFILE CONNECTION

4
LIGHT MODULES



LEDFLEX IN & OUT

SUITABLE FOR
LEDFLEX IN & OUT
PAG PRO 820

4
LIGHT MODULES



LEDFLEX IN & OUT

SUITABLE FOR
LEDFLEX IN & OUT
PAG PRO 820

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: FEMTOLINE W D/U, KASKADE (LEDFLEX IN MAX 15W/M) AND DOT.COM WALLWASH TR

LEDFLEX



5m - 24V-DC MOUNTED

0,3

	WHITE			NEW TW	NEW RGB
	Dividable per 100mm 70 smd LED/m	Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 180 smd LED/m	Dividable per 100mm 60 smd LED/m	
	5,1W/m 650lm/m	15,1W/m 1400lm/m	21,6W/m 2100lm/m	14,4W/m 1350lm/m	14,4W/m
CRI > 90	LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
4000K ●					
IN	300 91 52 94	300 91 53 94	300 91 54 94		
OUT (IP65)	300 91 62 94	300 91 63 94			
3000K ●					
IN	300 91 52 93	300 91 53 93	300 91 54 93		
OUT (IP65)	300 91 62 93	300 91 63 93			
2700K ●					
IN	300 91 52 92	300 91 53 92	300 91 54 92		
OUT (IP65)	300 91 62 92	300 91 63 92			
2700K ● ▶ 5700K ●					
IN				21031 0010	
OUT (IP65)					
RGB ●					
IN					300 91 53 33
OUT (IP65)					300 91 63 33

LED POWER SUPPLY / INFO PAG TEC

24V-DC / 20W 300 89 24 20 OPTIONS 24V-DC / 4A DIM UNIT	max.4m	max.1m	max.0,9m	max.1,3m	max.1,3m *
24V-DC / 40W 300 89 24 40 OPTIONS 24V-DC / 4A DIM UNIT	max.8m	max.2,5m	max.1,8m	max.2,7m	max.2,7m *
24V-DC / 60W 300 89 24 60 OPTIONS 24V-DC / 4A DIM UNIT	max.12m	max.4m (max.3m / POWERLINE)	max.2,7m (max.3m / POWERLINE)	max.4,1m	max.4m *
24V-DC / 80W DIM1 300 89 24 80 ED1	max.16m	max.5m (max.3m / POWERLINE)	max.3,6m (max.3m / POWERLINE)		
24V-DC / 150W 300 89 24 150 OPTIONS 24V-DC / 4A DIM UNIT	max.30m	max.10m (max.3m / POWERLINE)	max.6,8m (max.3m / POWERLINE)	max.10,4m	max.10m *
MULTI POWER DIM7 300 90 64	max.4m	max.1,3m	max.0,9m		
MULTI POWER DIM6 300 90 61	max.4m	max.1,3m	max.0,9m		

RGB DRIVER / INFO PAG TEC

12/24V-DC 75/150W 300 90 331				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
--	--	--	--	--	--

TOUCH CONTROLLER / INFO PAG TEC

TW DMX 300 90 332				*use in combination with RGB DRIVER	
RGB DMX 300 90 330					*use in combination with RGB DRIVER

OPTIONS

24V-DC / 4A DIM1 UNIT ▶ **300 90 003 ED1**
 24V-DC / 4A DIM5 UNIT ▶ **300 90 003 ED5**
 24V-DC / 2x 4A WIRELESS DIM UNIT ▶ **300 90 010**

DIM 1 DIMMING BY 1-10V
DIM 6 DIMMING BY PUSH BUTTON / FALLING EDGE DIMMER
DIM 7 DIMMING BY PUSH BUTTON / 1-10V

