



**LEDSTRIP**

**COB linear**

**EE-COFS10**

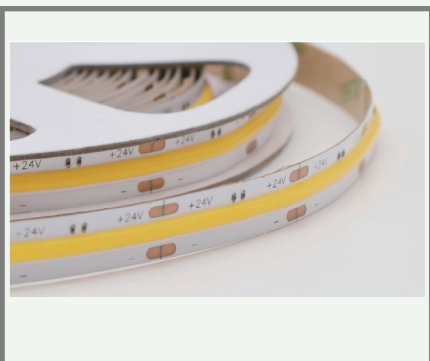

10W/m



2700K/3000k  
4000K



1150  
lm/m



140°



Dimmable  
PWM

**TECHNICAL FEATURES**


Power	10W/m
Input	24 Vdc
Dimmable	PWM
IP rating	20 / 65 / 67
Max. amb. Temp.	-20°C up to +40°C


**LIGHTING CHARACTERISTICS**

Light color	2700/3000/4000k
Beam angle	140°
CRI	RA90+
Lumen output	2700K: 1000 lm/m 3000K: 1050 lm/m 4000K: 1150 lm/m
Efficiency lm/w	2700K: 100 lm/w 3000K: 105 lm/w 4000K: 115 lm/w
LED's/m	480
LEDtype	COB lineair
Lifetime	L80B20 50000h
SDCM	< 3

**MEASUREMENTS AND MATERIAL FEATURES**

Measurements	10 x 1.8 x 5000 mm
Cutable every...	5 cm

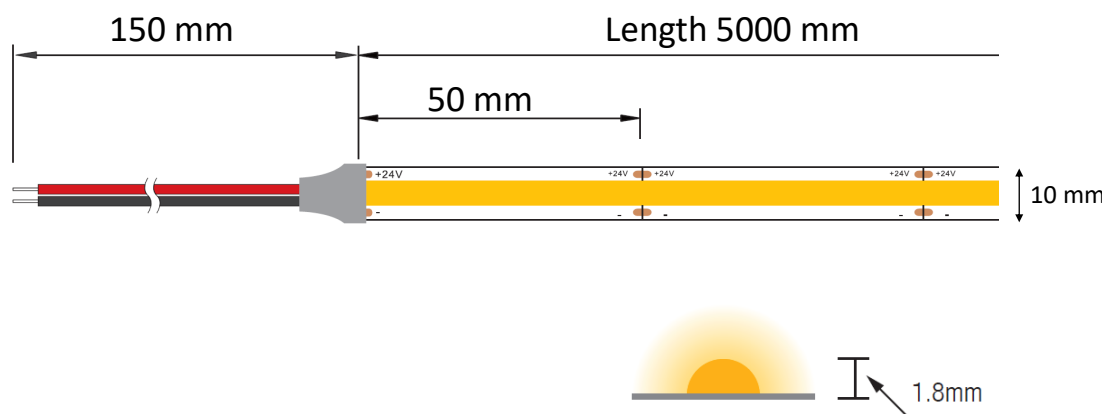

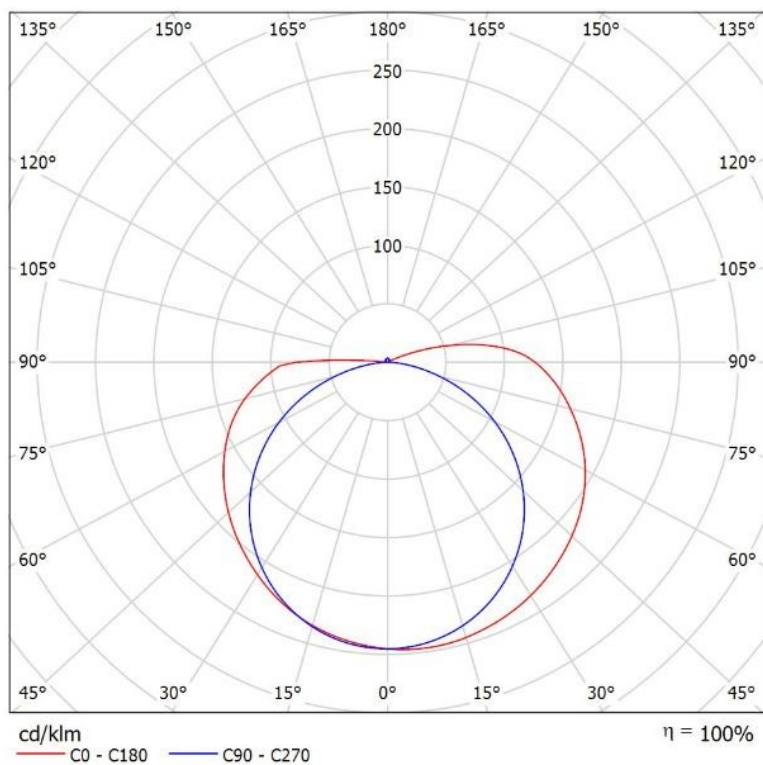

EE-COFS10

	PRODUCTTYPE	POWER	LIGHT COLOR	LENGTH	IP
<b>EE</b>	<b>-COFS</b>	<b>10</b>	<b>/ 27</b>	<b>- 5</b>	<b>WP</b>
	COB FLEXIBLE STRIP	WATT/M	KELVIN	M	WP waterproof IP65 N nanowaterproof IP67

SUMMARY PRODUCTCODES LEDSTRIP 10 WATT

- EE-COFS10/27-5
- EE-COFS10/30-5
- EE-COFS10/40-5
- EE-COFS10/27-5WP
- EE-COFS10/30-5WP
- EE-COFS10/40-5WP
- EE-COFS10/27-5N
- EE-COFS10/30-5N
- EE-COFS10/40-5N