

MINIPISTRELLO

code: **620/J/BI**








DESIGN **GAE AULENTI** 2013



MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB IN ALUMINUM LACQUERED IN THE NEW AGAVE GREEN /J/VE COLOR AND IN THE NEW BRASS SATIN /J/OT FINISH COLOR. ALSO AVAILABLE IN ALUMINUM LACQUERED IN THE SERIES-PRODUCTION COLORS: DARK BROWN /J/MA, WHITE /J/BI, PURPLE RED /J/RO, TITANIUM /J/TI. COPPER /J/CU AND GOLDEN /J/AU. LED LIGHT SOURCE INTEGRATED. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T/) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS




UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2,5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -		POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG	
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE		

MINIPISTRELLO

code: 620/J/BI

DESIGN GAE AULENTI 2013

TECHNICAL DRAWINGS

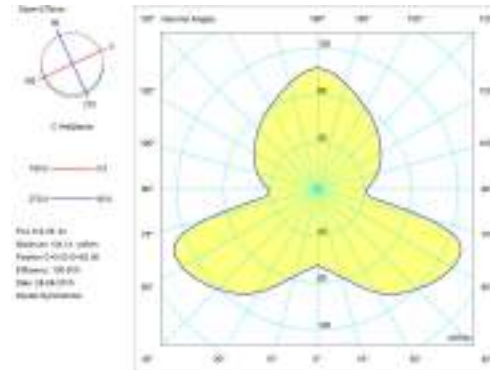

MINIPISTRELLO

code: *620/J/BI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

