





Neón de Luz

Joan Gaspar

marset

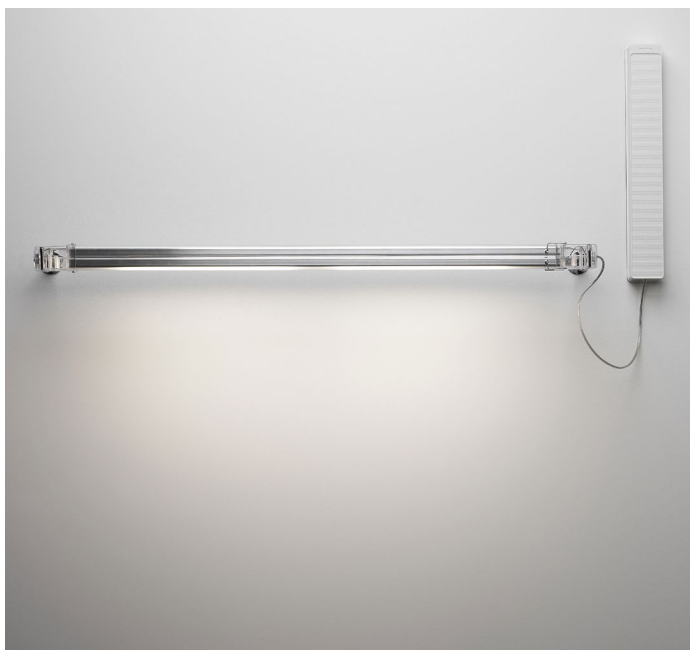

Neón de Luz NL - A



A	
64,5 cm	Light source: LED SMD 450mA 15W 3000K CRI80 2250lm Luminaire: 220 - 240 VAC 18,94W 220 - 240 VAC DALI 2 18,87W
94,5 cm	Light source: LED SMD 450mA 27,6W 3000K CRI80 3710lm Luminaire: 220 - 240 VAC 30,13W 2200lm 220 - 240 VAC DALI 18,94W 2200lm
124,5 cm	Light source: LED SMD 450mA 38,9W 3000K CRI80 5190lm Luminaire: 220 - 240 VAC 40,35W 3020lm 220 - 240 VAC DALI 40,29W 3020lm
154,5 cm	Light source: LED SMD 450mA 51,25W 3000K CRI80 8715lm Luminaire: 220 - 240 VAC 55,98W 4274lm 220 - 240 VAC DALI 55,8W 4274lm


Modular system consisting of polycarbonate profile with an aluminium reflector inside. Chromed zamac brackets. Reactance box in white polycarbonate.

Structure

- Transparente-Chrome

Diffuser

- Aluminium



Translucent electrical cord

- [Download](#) Assembly Instructions
- [Download](#) 2D
- [Download](#) 3D

Range



info@marset.com
www.marset.com

Néon de Luz marks an inflexion point in the conventional modular systems as it abandons the coldness that distinguishes this type of lighting.